EN

RF01089

4mt steel wire Ø1,2 with 19 winded wires

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.
For the installation of the spare-part, it is necessary to consult a qualified electrician.

©2021 Flos - All rights reserved - www.flos.com
Flos reserves the right to introduce any changes to its own models, without prior notice.

EN

RF01089

4mt steel wire Ø1,2 with 19 winded wires

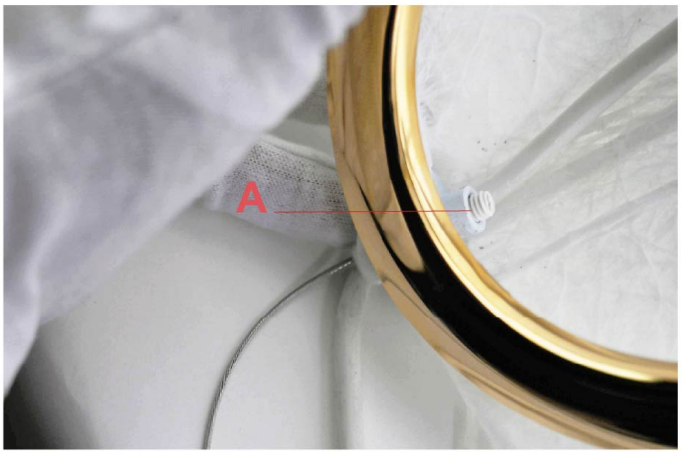

Fig.1

Fig.2

Fig. 1: Using a flat screwdriver, unscrew the steel cable fixing screw (A)
Fig. 2: Holding the product structure still, pull out the steel cable and remove it. Perform the reverse procedure, installing the new steel cable and securing it securely with the white screw.

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.
For the installation of the spare-part, it is necessary to consult a qualified electrician.

©2021 Flos - All rights reserved - www.flos.com
Flos reserves the right to introduce any changes to its own models, without prior notice.