


Nota Informativa DLB

A ELECTRICAL CONNECTION

CONEXIÓN ELÉCTRICA / CONNESSIONE ELETTRICA / ELEKTRISCHER ANSCHLUSS / CONNEXION ÉLECTRIQUE / LIGAÇÃO ELÉCTRICA /
のコネクション / 電力连接 / ЭЛЕКТРИЧЕСКОЕ ПОДКЛЮЧЕНИЕ / ЭЛЕКТРЛІК БАЙЛАНЫС / التوصيل الكهربائي

DALI VERSION (DALI compatible not certified)

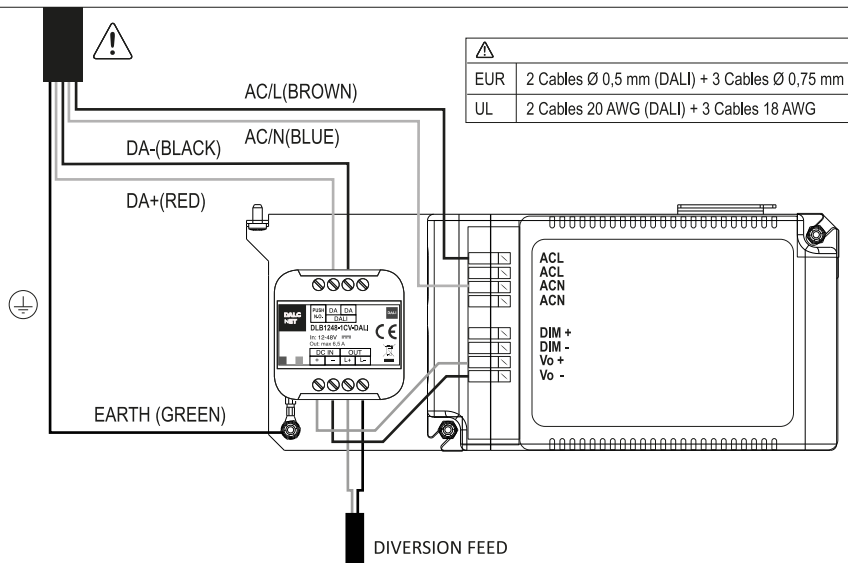

TECHNICAL SPECS. Vin (min/max): 10.8/52.8V In Max (mA): 6.5A

Use only a SELV power supplies with limited current and short circuit protection.

The connection cables between the power source "low voltage" and the product must be dimensioned correctly and they should be isolated from every wiring or parts at voltage not SELV. Use double insulated cables if needed.

Length and type of the connection cables at the DALI BUS; use cables as per specification of the respective protocols and regulations and they should be isolated from every wiring or parts at voltage not SELV.

Use double insulated shielded and twisted cables.