

**RF06747**

Hook + nut



WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.  
For the installation of the spare-part, it is necessary to consult a qualified electrician.

**RF06747**

Hook + nut

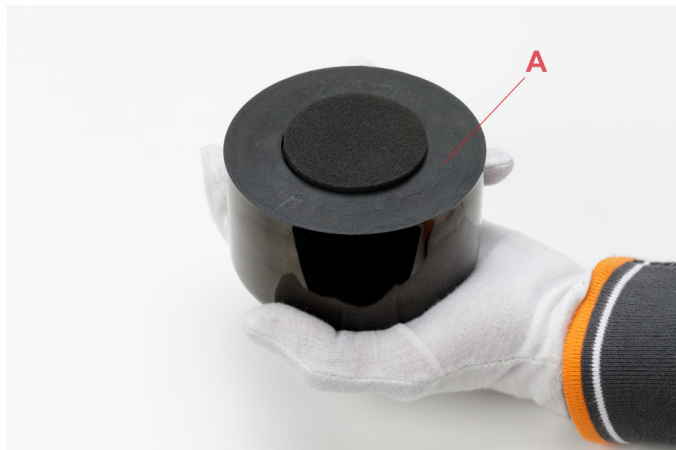


Fig.1



Fig.2

Remove the pad (B) from underneath the counterweight (A).

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.  
For the installation of the spare-part, it is necessary to consult a qualified electrician.

**RF06747**

Hook + nut

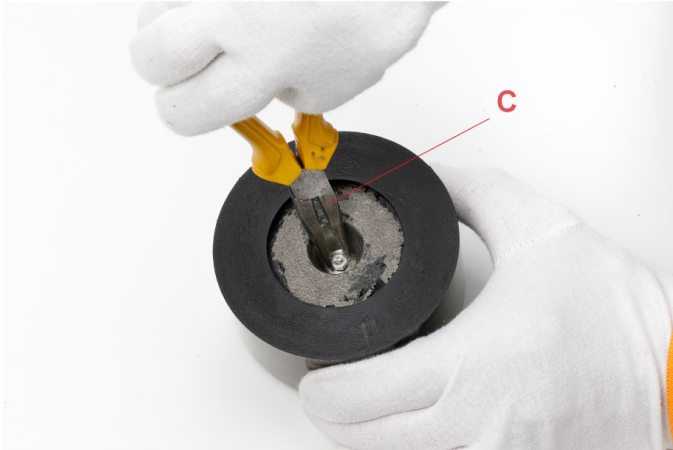


Fig.3



Fig.4



Fig.5

By utilizing a pair of pliers (C), unfasten the nut (D).  
Remove the damage hook (E) from the counterweight (A).

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.  
For the installation of the spare-part, it is necessary to consult a qualified electrician.

**RF06747**

Hook + nut



Fig.6



Fig.7

Assemble now the new spare-part:  
Verify on the new spare part that the nut (D) is unfastened from the hook (E).  
Insert the hook (E) through the counterweight (A).

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.  
For the installation of the spare-part, it is necessary to consult a qualified electrician.

**RF06747**

Hook + nut

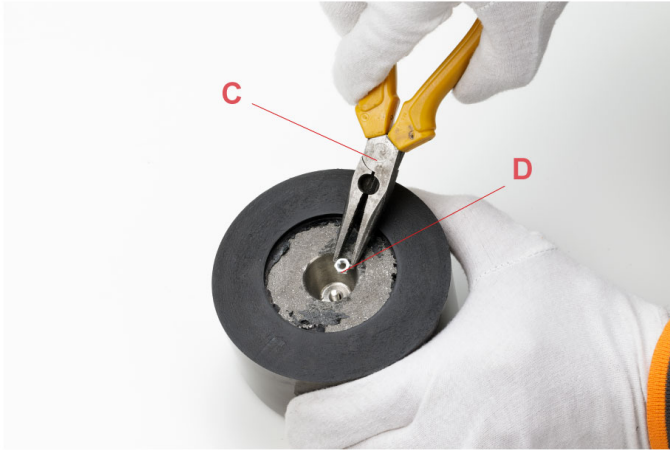


Fig.8




Fig.9

Fasten the nut (D) by utilizing the pliers (C).  
Glue the pad (B) and onto the counterweight (A).

WARNING! When installing and whenever acting on the appliance, ensure that the power supply has been switched off.  
For the installation of the spare-part, it is necessary to consult a qualified electrician.

**RF06747**

Hook + nut

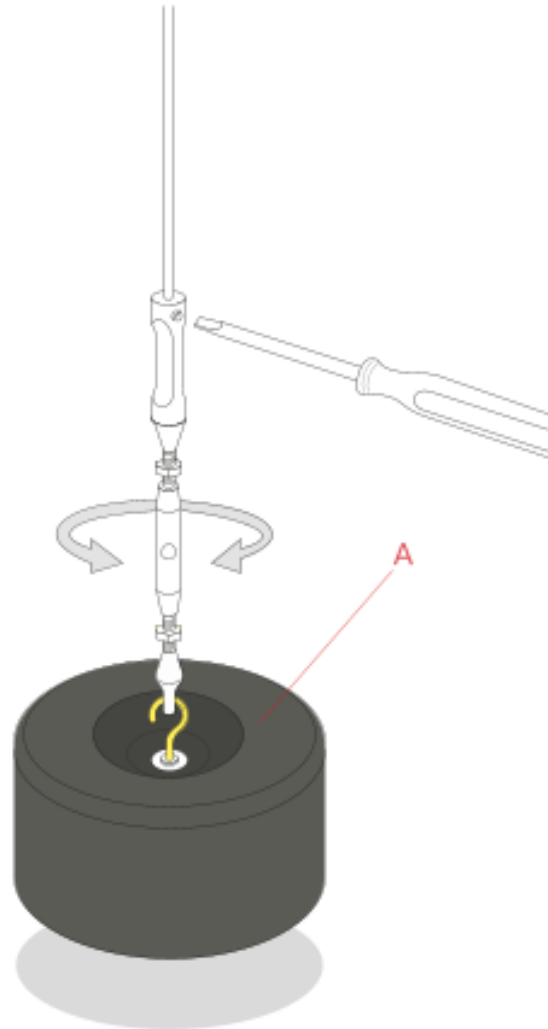**Fig.10**

Hook the turnbuckle to the counterweight (A).

Regulate the turnbuckle in a way that the counterweight almost touches the floor and then fasten the locking bolts.

Verify that the suspension wire is perpendicular.

**WARNING!** Lifting up the counterweight will cause mechanical tension loss of the suspension wire, causing the tube and lamp support to fall down.

**WARNING!** When installing and whenever acting on the appliance, ensure that the power supply has been switched off. For the installation of the spare-part, it is necessary to consult a qualified electrician.