

# FLOS


FA1051730006.A Grey

## Aimer 1 Rgb

Designed by FLOS Outdoor, 2011



RGB LED source included. Remote electrical power supply with DMX 3chx350mA interface to be ordered separately. Serial connection. Equipped with a 2000 mm protruding section of neoprene cable and a kit with crimpable connectors and adhesive heat-shrinkable sleeves that guarantee the tightness of the connection. Sandblasted screen-printed glass. The metal nail for ground installation needs to be ordered separately.

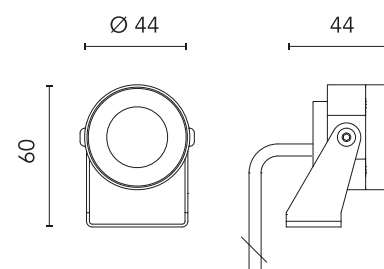

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

|                        |                      |
|------------------------|----------------------|
| EAN                    | 8054793608280        |
| Mounting               | Ground               |
| Environments           | Outdoor wet location |
| Light source type      | LED                  |
| Light sources included | Yes                  |
| LED type               | Power LED            |
| Number of lamps        | 1                    |
| Power (W)              | 3                    |
| System power (W)       | 3.4                  |

### Physical

|                          |             |
|--------------------------|-------------|
| Colour                   | Grey        |
| Orientation              | Directional |
| Longitudinal tilting (°) | 189         |
| Net weight (kg)          | 0.4         |
| Package height (mm)      | 90          |
| Package width (mm)       | 140         |
| Package length (mm)      | 140         |
| IP internal              | 67          |
| IP external              | 66          |

### Download

[Mounting instructions](#)  ZIP

### Ecodesign and Energy Labelling

  Replaceable (LED only) light source by a professional



## Photometric

|                    |           |
|--------------------|-----------|
| Light distribution | Symmetric |
| CCT (K)            | RGB       |
| Extreme cut off    | No        |

## Electrical

|                   |   |
|-------------------|---|
| Insulation class  | III   |
| Frequency (Hz)    | 50/60                                       |
| Power supply      | Remote excluded                             |
| Dimmable          | Yes   |
| Power supply type | Dimmable DMX                                |
| Dimming interface | Remote Dimmable<br>(Dimmer Not<br>Included) |
| Emergency         | No  |

## Notes

Please check with your referent person in our Front Office if a code modification is needed to meet the required certification compliance

---

## Accessories & Power Supply



OPTIONAL  
Accessory

F990B10A000

DMX controller; dimmer switch for recessed box (60mm hole centres)



OPTIONAL  
Accessory

F990B11A000

DMX controller; stand-alone/pc interface.



OPTIONAL  
Accessory

F990B13A000

DMX splitter 512



OPTIONAL  
Accessory

F990B12A000

DMX cable - shielded twisted pair with 110 Ohm constant impedance



OPTIONAL  
Accessory

FA5230

Visor for Aimer 1



OPTIONAL  
Accessory

FA136

Ground Spike Aimer 1/Aimer 2/Aimer 3/Perseo 2



OPTIONAL  
Power supply

F990B22A000

Power supply with DMX interface for RGB fixtures 36W/220÷240v-3CH x 350mA (3CH x 10 x 1W)  
DMX control allowed IP67 Class I  
Selv Eq.