


Almendra Linear Suspension 4

Designed by Patricia Urquiola, 2022


60W - 1828lm - 2700K - CRI> 95

Suspension lamp with diffused light emission available in linear and organic compositions. Tubular structure made of aluminium and CNC aluminium terminals with matte or metallized finish. Edge Lighting technology integrated. Light units can be turned by steps of 60° within the structure in order to change the direction of the light emitted. Metal rosette with matte white finish. The integrated electronics in the ceiling rose allow the use of different dimming systems: 1-10V, DALI, push-dim or potentiometer. Useful length of the cable 3 mt. The product has been designed according to the ISCC standards and it is assembled with total absence of glued components so that it can be completely separated for future recyclability.

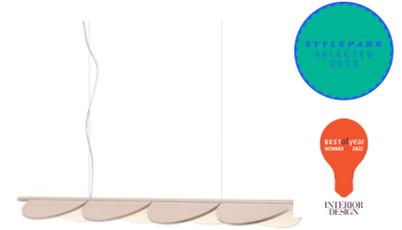

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

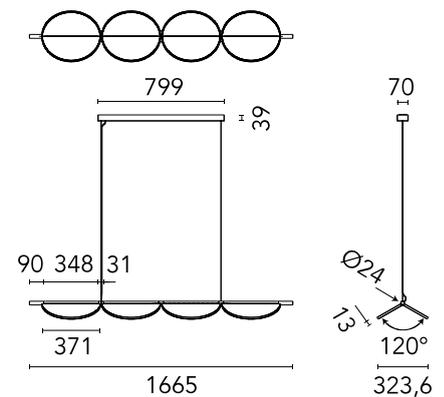

Main specifications

EAN	8059607048382
Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	Edge Lighting
Power (W)	60
Lumen Output (lm)	1828

Physical

Colour	Nude
Length (mm)	1665
Cord colour	Clear
Cord length (mm)	2600
Canopy colour	White
Canopy length/diameter (mm)	799
Canopy width (mm)	70
Canopy height (mm)	39
Net weight (kg)	10.18
Package volume (m3)	0.22
IP internal	20

Download

Mounting instructions [↓ PDF](#)

Photometric Files


LDT / IES [↓ LDT](#)

Technical Drawings


2D [↓ ZIP](#)

3D [↓ ZIP](#)

[🔒 Bim](#) [↓ ZIP](#)

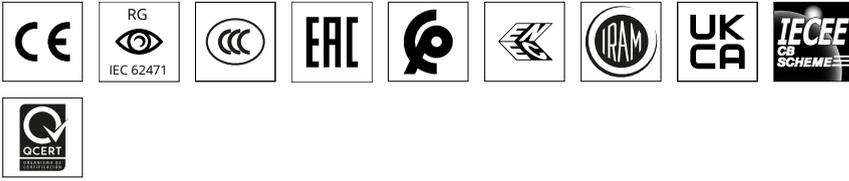

Schematic light drawing



Photometric


Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	95

Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
Power supply	Integrated
Dimmable	Yes
Power supply type	Dimmable 0-10V, Dimmable 1-10V, Dimmable DALI 1, Dimmable Push
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E

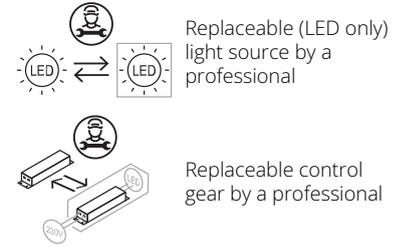

Spare Parts

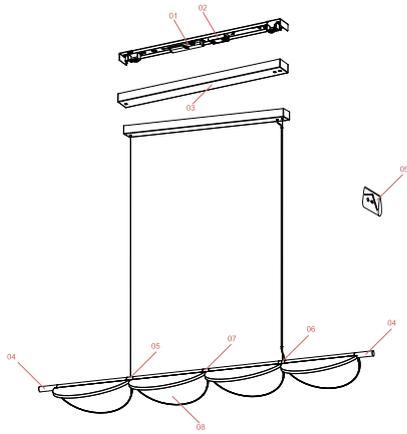

- | | | |
|-----|---|-----------|
| 01. | Driver 96W 48V 220-240V | RF32405 |
| 02. | Led dimmer kit | RF34197 |
| 03. | Almendra S4 Cover ceiling rose | RF0392109 |
| 04. | Almendra Nude terminal joint L90 | RF32775 |
| 05. | Almendra Suspension nude wiring & connection assembly | RF32532 |
| 06. | Almendra Suspension nude central feed assembly | RF32523 |
| 07. | Almendra Suspension nude wiring assembly | RF32571 |
| 08. | Almendra Suspension Nude body assembly | RF32516 |
| 09. | Kit with screws and allen key | RF3160100 |



RF32405
Driver 96W 48V 220-240V



RF34197
Led dimmer kit



RF0392109
Almendra S4 Cover ceiling rose



RF32775
Almendra Nude terminal joint L90



RF32532
Almendra Suspension nude
wiring & connection assembly



RF32523
Almendra Suspension nude
central feed assembly



RF32571
Almendra Suspension nude
wiring assembly



RF32516
Almendra Suspension Nude body
assembly



RF3160100

Kit with screws and allen key