
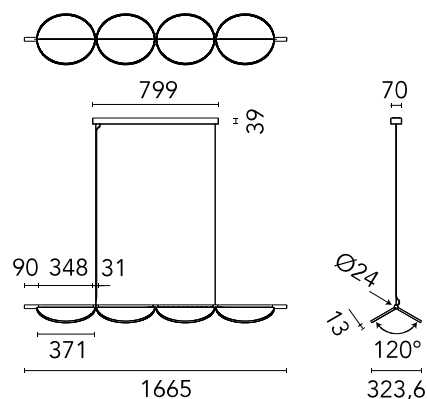


Almendra Linear Suspension 4 Primer

Designed by Patricia Urquiola, 2022

60W - 1828lm - 2700K - CRI> 95

Suspension lamp with diffused light emission available in linear and organic compositions. Tubular structure made of aluminium and CNC aluminium terminals with matte or metallized finish. Edge Lighting technology integrated. Light units can be turned by steps of 60° within the structure in order to change the direction of the light emitted. Metal rosette with primer finish. The integrated electronics in the ceiling rose allow the use of different dimming systems: 1-10V, DALI, push-dim or potentiometer. Useful length of the cable 3 mt. The product has been designed according to the ISCC standards and it is assembled with total absence of glued components so that it can be completely separated for future recyclability.

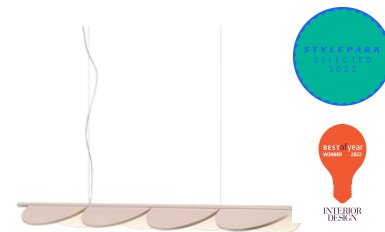

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

EAN	8059607050750
Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	Edge Lighting
Power (W)	60
Lumen Output (lm)	1828

Physical

Colour	Nude
Length (mm)	1665
Cord colour	Clear
Canopy colour	Primer
Canopy length/diameter (mm)	799
Canopy width (mm)	70
Canopy height (mm)	39
Net weight (kg)	10.18
Package volume (m3)	0.22
IP internal	20

Download

Mounting instructions [↓ PDF](#)

Photometric Files


LDT / IES [↓ LDT](#)

Technical Drawings


2D [↓ ZIP](#)

3D [↓ ZIP](#)

[Bim](#) [↓ ZIP](#)

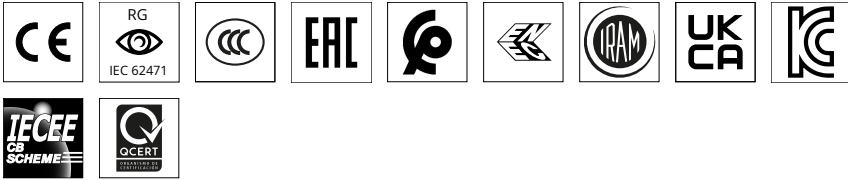

Schematic light drawing



Photometric


Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	95

Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
Power supply	Integrated
Dimmable	Yes
Power supply type	Dimmable 0-10V, Dimmable 1-10V, Dimmable DALI 1, Dimmable Push
Dimming interface	Remote Dimmable (Dimmer Not Included)

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E

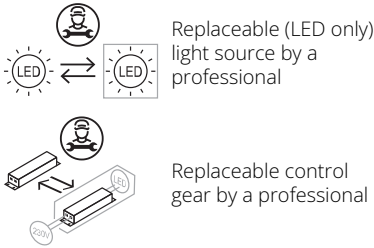

Spare Parts

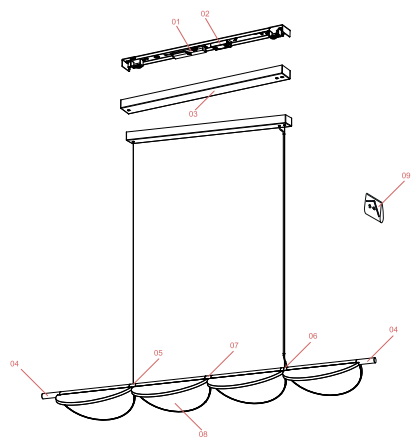

01.	Driver 96W 48V 220-240V	RF32405
02.	Led dimmer kit	RF34197
04.	Almendra Nude terminal joint L90	RF32775
05.	Almendra Suspension nude wiring & connection assembly	RF32532
06.	Almendra Suspension nude central feed assembly	RF32523
07.	Almendra Suspension nude wiring assembly	RF32571
08.	Almendra Suspension Nude body assembly	RF32516
09.	Kit with screws and allen key	RF3160100



RF32405

Driver 96W 48V 220-240V



RF34197

Led dimmer kit



RF32775

Almendra Nude terminal joint L90

FLOS

RF32532

Almendra Suspension nude
wiring & connection assembly

FLOS

RF32523

Almendra Suspension nude
central feed assembly

FLOS

RF32571

Almendra Suspension nude
wiring assembly

FLOS

RF32516

Almendra Suspension Nude body
assembly



RF3160100

Kit with screws and allen key