


Almendra Linear Suspension 4 Primer

Designed by Patricia Urquiola, 2022

60W - 1804lm - 2700K - CRI> 95

Suspension lamp with diffused light emission available in linear and organic compositions. Tubular structure made of aluminium and CNC aluminium terminals with matte or metallized finish. Edge Lighting technology integrated. Light units can be turned by steps of 60° within the structure in order to change the direction of the light emitted. Metal rosette with primer finish. The integrated electronics in the ceiling rose allow the use of different dimming systems: 1-10V, DALI, push-dim or potentiometer. Useful length of the cable 3 mt. The product has been designed according to the ISCC standards and it is assembled with total absence of glued components so that it can be completely separated for future recyclability.

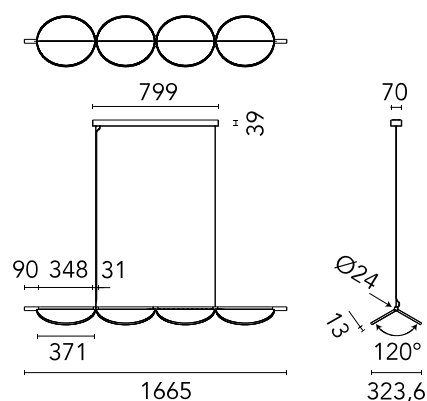

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

EAN	8059607050774
Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	Edge Lighting
Power (W)	60
Lumen Output (lm)	1804

Physical

Colour	Anthracite
Length (mm)	1665
Cord colour	Clear
Canopy colour	Primer
Canopy length/diameter (mm)	799
Canopy width (mm)	70
Canopy height (mm)	39
Net weight (kg)	10.18
Package volume (m3)	0.22
IP internal	20

Download

Mounting instructions [Download PDF](#)

Photometric Files


LDT / IES [Download LDT](#)

Technical Drawings


2D [Download ZIP](#)

3D [Download ZIP](#)

[Bim](#) [Download ZIP](#)

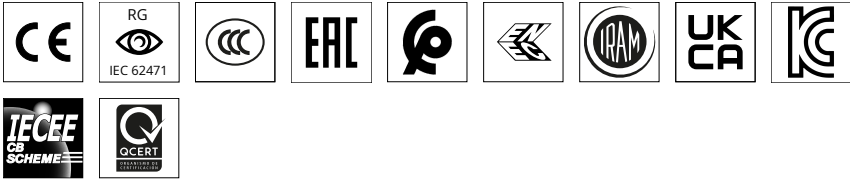

Schematic light drawing



Photometric


Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	95

Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
Power supply	Integrated
Dimmable	Yes
Power supply type	Dimmable 0-10V, Dimmable 1-10V, Dimmable DALI 1, Dimmable Push
Dimming interface	Remote Dimmable (Dimmer Not Included)

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E




Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

Spare Parts

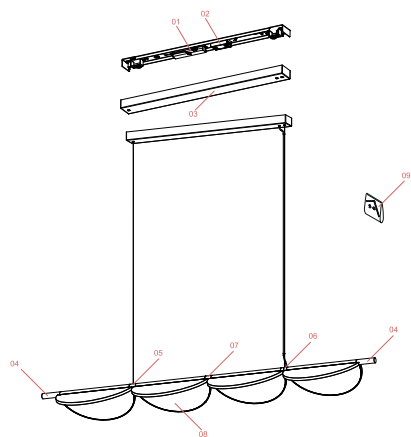

01.	Driver 96W 48V 220-240V	RF32405
02.	Led dimmer kit	RF34197
04.	Terminal Joint L90 Almendra Anthracite	RF32776
05.	Assembly Almendra Suspension Wiring & Connections Athracite	RF32533
06.	Assembly Almendra Suspension Central Feed Anthracite	RF32524
07.	Assembly Almendra Suspension Wiring Athracite	RF32572
08.	Almendra Suspension Anthracite body assembly	RF32517
09.	Kit with screws and allen key	RF3160100



RF32405

Driver 96W 48V 220-240V



RF34197

Led dimmer kit



RF32776

Terminal Joint L90 Almendra
Anthracite

FLOS

RF32533

Assembly Almendra Suspension
Wiring & Connections Anthracite

FLOS

RF32524

Assembly Almendra Suspension
Central Feed Anthracite

FLOS

RF32572

Assembly Almendra Suspension
Wiring Anthracite

FLOS

RF32517

Almendra Suspension Anthracite
body assembly



RF3160100

Kit with screws and allen key