

# FLOS


FA10525614557 Polished Stainless Steel

## Aqua Aimer 5 Rgb

Designed by FLOS Outdoor, 2011



RGB LED source included. 316L stainless steel body and bracket, suitable for submersion. Remote electrical power supply with DMX 3chx350mA interface to be ordered separately. Serial connection. Equipped with a 5000 mm protruding section of neoprene cable and a kit with crimpable connectors and adhesive heat-shrinkable sleeves that guarantee the tightness of the connection. Transparent screen-printed glass. Fixing bracket included. The metal nail for ground installation needs to be ordered separately.

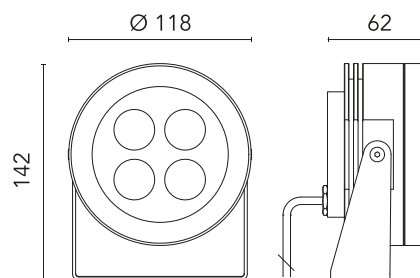

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

EAN	8054793611365
Mounting	Ground
Environments	Outdoor wet location
Light source type	LED
Light sources included	Yes
LED type	Power LED
Number of lamps	1
Power (W)	14
System power (W)	13.6

### Physical

Colour	Polished Stainless Steel
Orientation	Directional
Net weight (kg)	2.25
Package height (mm)	175
Package width (mm)	135
Package length (mm)	135
IP internal	68
IP external	66

### Download

[Mounting instructions](#)



### Ecodesign and Energy

#### Labelling



Replaceable (LED only)  
light source by a  
professional



## Photometric

Light distribution	Symmetric
CCT (K)	RGB
Extreme cut off	No

## Electrical

Insulation class	III
Frequency (Hz)	50/60
Power supply	Remote excluded
Dimmable	Yes
Power supply type	Dimmable DMX
Dimming interface	Remote Dimmable (Dimmer Not Included)
Emergency	No

## Notes

Please check with your referent person in our Front Office if a code modification is needed to meet the required certification compliance

---

## Accessories & Power Supply



### OPTIONAL Accessory

F990B10A000

DMX controller; dimmer switch for recessed box (60mm hole centres)



### OPTIONAL Accessory

F990B11A000

DMX controller; stand-alone/pc interface.



### OPTIONAL Accessory

F990B13A000

DMX splitter 512



### OPTIONAL Accessory

F990B12A000

DMX cable - shielded twisted pair with 110 Ohm constant impedance



### OPTIONAL Accessory

FA136

Ground Spike Aimer 1/Aimer 2/Aimer 3/Perseo 2



### OPTIONAL Power supply

F990B22A000

Power supply with DMX interface for RGB fixtures 36W/220÷240V-3CH x 350mA (3CH x 10 x 1W)  
DMX control allowed IP67 Class I Selv Eq.