

# FLOS

F1070026 Cioko

## Bellhop Floor

Designed by Edward Barber and Jay Osgerby, 2020

26W - 1023lm - 2700K - CRI> 90

Floor lamp with indirect light. Stem in painted aluminium: shiny white, brick, cioko, green. Reflector in shiny opal white and grey blown glass. Electrical cable of 270 cm usable length with foot dimmer switch for ON/OFF function and brightness adjustment 10–100%. Power supply with interchangeable plugs.



Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

### Main specifications

|                        |                     |
|------------------------|---------------------|
| EAN                    | 8059607039700       |
| Mounting               | Floor               |
| Environments           | Indoor dry location |
| Light source type      | LED                 |
| Light sources included | Yes                 |
| LED type               | LED array           |
| Power (W)              | 26                  |
| System power (W)       | 26                  |
| Lumen Output (lm)      | 1023                |

### Physical

|                     |       |
|---------------------|-------|
| Colour              | Cioko |
| Length (mm)         | 260   |
| Cord colour         | Black |
| Cord length (mm)    | 2700  |
| Net weight (kg)     | 9.82  |
| Package volume (m3) | 0.05  |
| IP internal         | 20    |



### Download

Mounting instructions [Download PDF](#)

Mounting instructions [Download PDF](#)

### Photometric Files

LDT / IES [Download LDT](#)


### Technical Drawings

3D [Download ZIP](#)

[Bim](#) [Download ZIP](#)



Schematic light drawing



Photometric

|                    |                |
|--------------------|----------------|
| Lighting type      | Indirect       |
| Light distribution | Roto symmetric |
| CCT (K)            | 2700           |
| CRI>               | 90             |
| Extreme cut off    | No             |

Electrical

|                    |                                     |
|--------------------|-------------------------------------|
| Insulation class   | III                                 |
| Frequency (Hz)     | 50/60                               |
| Main voltage (Vac) | 100-240                             |
| LED current (mA)   | 700                                 |
| Power supply       | Remote included                     |
| Dimmable           | Yes                                 |
| Power supply type  | Electronic 48V                      |
| Dimming interface  | Switch Integrated (Remote Dimmable) |
| Plug type          | Type A, Type C, Type G              |
| Batteries inside   | No                                  |


Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class G

Replaceable (LED only) light source by a professional

Replaceable control gear by an end-user

Spare Parts

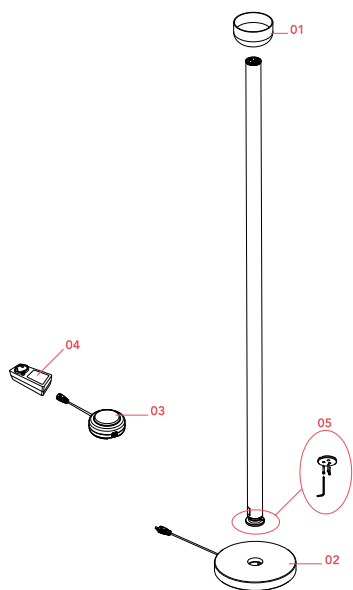

- |     |                                            |           |
|-----|--------------------------------------------|-----------|
| 01. | Bellhop Floor Reflector White              | F1073009  |
| 02. | Bellhop Floor Base Concrete                | F1072009  |
| 03. | Bellhop Floor Switch Dimmer Assembly 700mA | RF30216   |
| 04. | Black plug assembly kit & 48V driver       | RF6600130 |
| 05. | Bellhop F Kit screws for base              | RF1070100 |



F1073009

Bellhop Floor Reflector White



F1072009

Bellhop Floor Base Concrete




RF30216

Bellhop Floor Switch Dimmer  
Assembly 700mA



RF6600130

Black plug assembly kit & 48V  
driver



RF1070100

Bellhop F Kit screws for base