



03.8506.18.1V Natural Leather

## Belt L 3000 mm Dimmable 1-10V

Designed by Ronan & Erwan Bouroullec

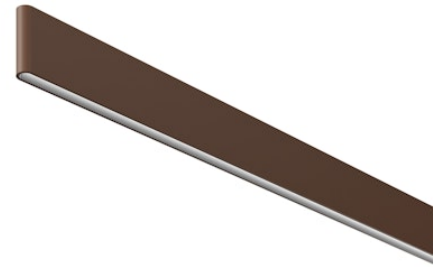

Electromechanical profile for interior use with integrated linear lighting for suspended installation available with 2 or 3 m lengths. Installation via suspension leather or fabric straps on the ceiling and remote power kit, to be ordered separately. Up&Down system controlled via DALI or CASAMBI individually and via 1-10V all together (Broadcast).



Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	Top LED
Number of lamps	1
Power (W)	83
Lumen Output (lm)	2872

### Physical

Colour	Natural Leather
Orientation	Fixed
Length (mm)	3000
Net weight (kg)	4.05
Package height (mm)	127
Package width (mm)	3100
Package length (mm)	127
IP internal	20

### Download

Mounting instructions [↓ PDF](#)

### Photometric Files

LDT / IES [↓ ZIP](#)

### Technical Drawings

2D [↓ ZIP](#)

3D [↓ ZIP](#)


[↓ Bim](#) [↓ ZIP](#)



### Ecodesign and Energy Labelling

Replaceable (LED only) light source by a professional

## Schematic light drawing



Beam Angle: 60°

h(m)	E(lx)	D(m)
1	877	1.16
2	219	2.31
3	97	3.47
4	55	4.63
5	35	5.79

Luminous flux luminaire  
2872 lm

### Photometric

Lighting type	Direct, Indirect
Light distribution	Asymmetric
CCT (K)	3000
CRI>	95
McAdam steps (SDCM)	3
Beam angle C0-180 (°)	60
Beam angle C90-270 (°)	100
Beam angle indirect C0-180 (°)	80
Beam angle indirect C90-270 (°)	90

### Electrical

Insulation class	III
Forward voltage (V)	48
Power supply	Remote excluded
Dimmable	Yes
Power supply type	Dimmable 1-10V
Dimming interface	Remote Dimmable (Dimmer Not Included)

### Notes

Power kit and suspension straps sold separately. For the sizing of the installation keep a safety margin of 15% of the maximum power of the LED power source.

## Accessories & Power Supply



REQUIRED  
Accessory

Installation

03.8520.18

48-V Power Loop L 1500 mm



REQUIRED  
Accessory

03.8510.18

Suspension strap L 1000 mm



REQUIRED  
Accessory

Installation

03.8511.18

Suspension strap L 2000 mm



REQUIRED  
Accessory

Installation

03.8512.18

Suspension strap L 3000 mm



REQUIRED  
Accessory

Installation

03.8521.18

48-V Power Loop L 2500 mm




REQUIRED  
Accessory

Installation

03.8522.18

48-V Power Loop L 3500 mm



REQUIRED  
Accessory

Installation

08.0180.00

Individual Ceiling Feed Box




REQUIRED  
Power supply

Electrical

60.9607

LED power supply source for remote installation, 110Vac-150W / 220Vac-200W




REQUIRED  
Accessory

Installation

08.0181.00


Double Ceiling Feed Box



REQUIRED  
Accessory

08.0194.00

Individual Surface Feed Box



REQUIRED  
Power supply

Installation

06.0173.14

Surface Driver Box 96W - 48V,  
110-240V.



REQUIRED  
Accessory

Installation

08.0182.00

Wall Mounted Feed Box



REQUIRED  
Accessory

Installation

03.8514.18

Suspension strap L 2500 mm



REQUIRED  
Power supply

Electrical

60.9170

LED power supply source for  
remote installation, 48V/120W.  
220/240 Vac




REQUIRED  
Accessory

Installation

03.8513.18

Suspension strap L 1500 mm



REQUIRED  
Accessory

08.0195.00

Double Surface Feed Box