

# FLOS

03.2003.01A White

## Bon Jour Ø 90 UPGRADE


Designed by Philippe Starck, 2016



Recessed luminaire with LED light source. Remote 220/240V power supply included.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



### Main specifications

Mounting	Semirecessed
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED array
Lamp category	LED
Number of lamps	1
Power (W)	16
System power (W)	17.5
Source flux (lm)	2040
Lumen Output (lm)	885

### Physical

Colour	White
Trim	Yes
Orientation	Fixed
Recessed depth (mm)	155
Length (mm)	90
Net weight (kg)	0.53
IP internal	20
IP external	44

### Download

[Mounting instructions](#) PDF

### Photometric Files

[LDT / IES](#) ZIP

### Technical Drawings


[2D](#) ZIP

[3D](#) ZIP

[Bim](#) ZIP



## Schematic light drawing

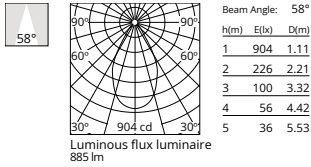

## Photometric


Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
LED Life / Failure Ratio	L80B50 > 55.000h (Tc=85°C)
Beam angle C0-180 (°)	57
Beam angle C90-270 (°)	57
Extreme cut off	No

## Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	110-240
LED current (mA)	400
Power supply	Remote included
Dimmable	No
Power supply type	Non Dimmable

## Ecodesign and Energy

### Labelling

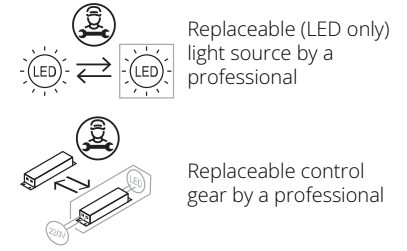

## Notes

Pre-installation frame must be ordered separately

## Accessories & Power Supply



### REQUIRED Frame

08.8974.00

Pre-installation frame



### OPTIONAL Accessory

08.8976.14

Honeycomb and cross screening  
cylinder for Bon Jour 90