


FLOS

F1848033 Argent


Coordinates Suspension 4 CLIII

Designed by Michael Anastassiades, 2020

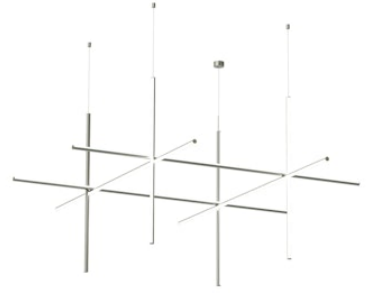

147W - 8830lm - 2700K - CRI> 95

Coordinates is a lighting system with diffuse light composed of horizontal and vertical luminaires arranged in a bright grid of various shapes and complexities. Each element is made of extruded anodized aluminium with a champagne finish and a diffuser in platinum optical silicone with an integrated LED strip (CRI 95). Each element is powered and supported by an invisible electrical and mechanical connection designed specifically to allow for the composition of the 4 hanging models (S1, S2, S3, S4) with 2.4-m cables. The 'S Module' is also available. Its geometry was designed to be repeated to create large grids for custom installations. Each Coordinates configuration includes its own ceiling rose, whose integrated electronics allow for the use of different dimmer systems: push, 1-10, DALI. In the absence of these systems, the amount of light can be set during installation with the push system included in the rose. The related CI III version is also available for each configuration for installations with a remote power supply.

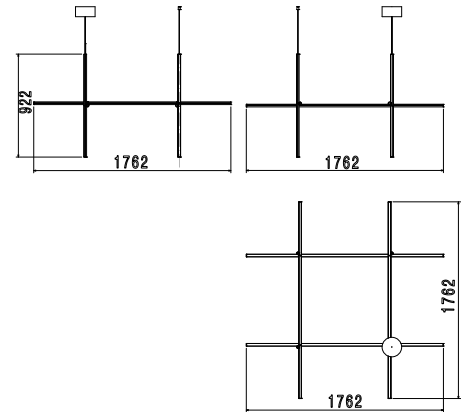

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

EAN	8059607038376
Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	147
Lumen Output (lm)	8830

Physical

Colour	Argent
Length (mm)	1770
Cord colour	Clear
Cord length (mm)	2400
Canopy colour	Argent
Canopy length/diameter (mm)	61
Canopy height (mm)	29
Net weight (kg)	5.2
Package volume (m3)	0.05
IP internal	20

Download

Mounting instructions [↓ PDF](#)


Photometric Files

ULD [↓ ZIP](#)

Technical Drawings

3D [↓ ZIP](#)

[Bim](#) [↓ ZIP](#)



Photometric

Lighting type	Total
Light distribution	Asymmetric
CCT (K)	2700
CRI>	95
Extreme cut off	No

Electrical

Insulation class	III
Main voltage (Vac)	48
Power supply	Remote excluded
Power supply type	Electronic 48V
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F



Accessories & Power Supply



OPTIONAL

RF29209

48Vdc 180W Power supply




OPTIONAL

RF26994

12-48V Led Dimmer

Spare Parts

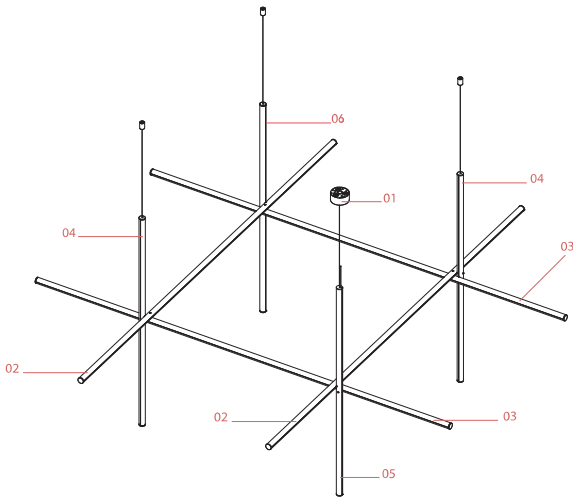

- | | | |
|-----|---|-----------|
| 01. | Coordinates S CL. III Assembly
Ceiling Rose Cover Argent | RF1874133 |
| 02. | Coordinates Suspension 4 Rod
Assembly L920 S-13 Argent | RF30921 |
| 03. | Coordinates Rod Assembly L1760
H-10 Argent | RF30918 |
| 04. | Coordinates Suspension 4 Rod
Assembly L920 S-14 Argent | RF30922 |
| 05. | Coordinates Suspension Rod
Assembly L920 SA-40 Slv | RF30948 |



RF1874133
Coordinates S CL. III Assembly
Ceiling Rose Cover Argent



RF30921
Coordinates Suspension 4 Rod
Assembly L920 S-13 Argent



RF30918
Coordinates Rod Assembly L1760
H-10 Argent



RF30922
Coordinates Suspension 4 Rod
Assembly L920 S-14 Argent



RF30948
Coordinates Suspension Rod
Assembly L920 SA-40 Slv