

# FLOS


FA53912433 Anthracite

## Dooku 600 Double Top Pole Ø102 mm Foot&Cycle Optic

Designed by FLOS Outdoor, 2014



LED source included. Integrated power supply 220-240V ON/OFF and dimmable 1-10V or DALI. Fixing bracket included. Equipped with a 400mm protruding neoprene cable section and IP68 connectors. Double socket for 102mm diameter post. The post must be ordered separately. Smart-City version available upon request.

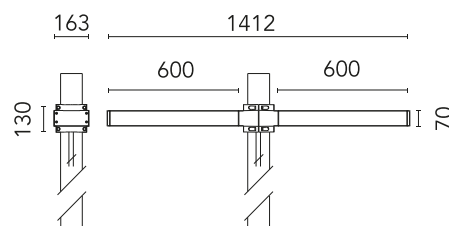

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

EAN	8054793683409
Mounting	Pole Top
Environments	Outdoor wet location
Light source type	LED
Light sources included	Yes
LED type	Power LED
Number of lamps	2
Power (W)	67
System power (W)	2X78
Source flux (lm)	16486
Lumen Output (lm)	12522

### Physical

Colour	Anthracite
Orientation	Fixed
Net weight (kg)	13.8
Package height (mm)	825
Package width (mm)	380
Package length (mm)	185
Package volume (m <sup>3</sup> )	0.06
IP internal	65

### Download

[Mounting instructions](#)  ZIP

### Photometric Files

[LDT / IES](#)  ZIP


### Technical Drawings

[2D](#)  ZIP

[3D](#)  ZIP



## Schematic light drawing



Beam Angle: 41°

h(m)	E(lx)	D(m)
1	2813	0.91
2	703	1.82
3	313	2.73
4	176	3.63
5	113	4.54

Luminous flux luminaire  
6261 lm

## Photometric

Light distribution	Asymmetric
CCT (K)	2700
CRI>	80
Extreme cut off	No

## Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
Power supply	Integrated
Dimmable	No
Power supply type	Non Dimmable
Dimming interface	Not Dimmable
Emergency	No

## Notes

Please check with your referent person in our Front Office if a code modification is needed to meet the required certification compliance

## Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E

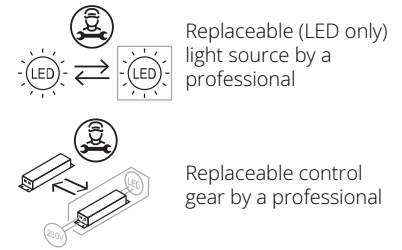

## Accessories & Power Supply



REQUIRED  
Pole

FA414033

Pole Ø 102 mm h 4000 mm With  
Base



REQUIRED  
Pole

FA414533

Pole Ø 102 mm h 4000 mm (+500  
mm In-ground)



REQUIRED  
Pole

FA415033

Pole Ø 102 mm h 5000 mm With  
Base



REQUIRED  
Pole

FA415533

Pole Ø 102 mm h 5000 mm (+500  
mm In-ground)



OPTIONAL  
Accessory

F990E00A000

S.P.D. (SURGE PROTECTION  
DEVICE)



OPTIONAL  
Accessory

FA116

Base Plate and Fixing Bolts for  
Pole Ø 102 mm h 4000/5000 mm  
with Base