

# FLOS

09.3711.14C Black

## Find Me 1 Suspension

Designed by Jorge Herrera, 2016


LED - Power LED - 6W - 344lm - 2700K - CRI> 90 - Beam° 14



Suspended ceiling-mounted luminaire. The product includes interchangeable shield cylinder in different colours (orange, violet and black). Remote power supply 500 mA not included.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



### Main specifications

Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	6
Lumen Output (lm)	344

### Physical

Colour	Black
Trim	No
Orientation	Adjustable
Net weight (kg)	0.23
IP internal	20

### Download

[Mounting instructions](#) PDF

[Item information](#) JPG

### Photometric Files


[LDT / IES](#) ZIP

### Technical Drawings


[2D](#) ZIP

[3D](#) ZIP


[Bim](#) ZIP

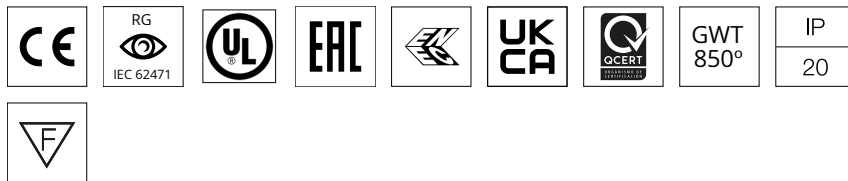

### Ecodesign and Energy Labelling



## Schematic light drawing



Beam Angle: 14°

h(m)	E(lx)	D(m)
1	4642	0.24
2	1160	0.48
3	516	0.72
4	290	0.95
5	186	1.19


## Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
Beam angle C0-180 (°)	14
Beam angle C90-270 (°)	14
UGR <sub>L</sub>	<10

## Electrical

Insulation class	III
Frequency (Hz)	0
Forward voltage (V)	12
LED current (mA)	500
Power supply	Remote excluded
Dimmable	Yes
Power supply type	Non Dimmable, Dimmable Casambi, Mains Cut Dimming, Dimmable 0-10V, Dimmable DALI 2

## Accessories & Power Supply



REQUIRED  
Power supply

Electrical

60.9222

Continuous current power supply of 12-20W, 110/240V - 50/60Hz with power current selected through adjustable 250mA - 12W / 350mA - 17W / 400mA - 19W / 450 / 500 / 550 / 600 / 700mA - 20W regulable Dali 1 & Dali 2

REQUIRED  
Accessory

08.8782.30

Recessed power supply rose

REQUIRED  
Power supply

Electrical

60.8880


Continuous current power supply of 6W, 100V / 14W, 240V - 50/60Hz with 500 mA supply voltage

REQUIRED  
Power supply

Electrical

60.9188

Continuous current power supply of 13-20W, 110\*/240V - 50/60Hz with current selected through adjustable 200 mA - 13W / 300 mA - 15W / 350 mA - 18W / 400 / 450 / 500 / 550 / 600 / 650 / 700 / 750 / 800 / 850 / 900 mA - 20W. switch. 0/1-10V or push.



REQUIRED  
Power supply

Electrical

60.9160

Non dimmable continuous current power supply of 220/240V - 50/60Hz with power current selected through adjustable with switch 200 mA - 8,5W / 250mA - 11W / 300 mA - 13W / 350 mA - 15W / 400 mA - 17,5W / 450 mA - 19,5W / 500 mA - 22W

REQUIRED  
Power supply

Electrical

60.9207

Casambi continuous current power supply, dimmable 220/240V - 50/60Hz, 300mA - 16W / 350mA - 18,5W / 400mA - 21,5W / 450 mA - 24W / 500mA - 27W / 600mA - 32W / 650 mA - 35W / 700 mA - 36W / 750 / 800 / 900 / 1000 / 1050 / 1200 mA - 38W.

REQUIRED  
Power supply

Electrical


60.9467

Mains dimming 20W Constant current power supply, AC phase-cut adjustable, trailing & leading edge dimming, 220/240V - 50/60Hz, with dip-switch programmable power supply current. Output current: 900mA - 20W / 850mA - 20W / 800mA - 20W / 750mA - 20W / 70...

REQUIRED  
Accessory

08.8783.14A


Surface Power Supply Rose



REQUIRED  
Accessory

08.8783.14ADA


Surface Power Supply Rose Dali



REQUIRED  
Accessory

08.8783.30A

Surface Power Supply Rose



REQUIRED  
Accessory

08.8783.30ADA

Surface Power Supply Rose Dali