

# FLOS

08.8591.40A White

## Junco 400 mm



Luminaire that offers many possibilities. Can be individually focused and their recessed height is adjustable.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

### Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
LED type	Power LED
Lamp category	LED
Power (W)	2.2
Source flux (lm)	216
Lumen Output (lm)	173

### Physical

Colour	White
Trim	No
Orientation	Adjustable
Rotation (°)	360
Longitudinal tilting (°)	20
Recessed depth (mm)	360
Length (mm)	400
Net weight (kg)	0.19
IP internal	20
IP external	20

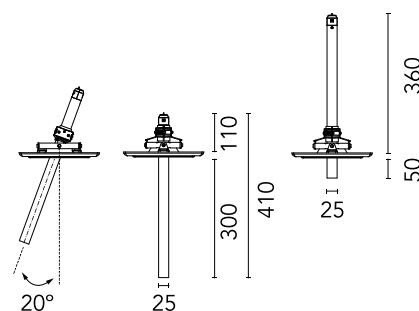

### Download

[Mounting instructions](#)  PDF

### Photometric Files

[LDT / IES](#)  LDT

### Technical Drawings

[2D](#)  ZIP

[3D](#)  ZIP



## Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	3000
CRI>	80
Beam angle C0-180 (°)	15
Beam angle C90-270 (°)	15
UGR <sub>L</sub>	<10

## Electrical

Forward voltage (V)	3
Power supply	Remote excluded
Dimmable	No
Power supply type	Non Dimmable, Dimmable Push, Dimmable 1-10V
Emergency	No

## Notes

Soft Plate to be order separately.

---

## Accessories & Power Supply



### OPTIONAL Power supply

Electrical

60.8911

Non dimmable continuous current power supply of 15-20W, 110/240V - 50/60Hz, with power current selected through adjustable 350 mA-15W /500 mA /550 / 700 / 850 mA / 900 mA - 20W switch



### OPTIONAL Power supply

Electrical

60.9188

Continuous current power supply of 13-20W, 110\*/240V - 50/60Hz with current selected through adjustable 200 mA - 13W / 300 mA - 15W / 350 mA - 18W / 400 / 450 / 500 / 550 / 600 / 650 / 700 / 750 / 800 / 850 / 900 mA - 20W. switch. 0/1-10V or push.



### OPTIONAL Power supply

Electrical

60.9222

Continuous current power supply of 12-20W, 110/240V - 50/60Hz with power current selected through adjustable 250mA - 12W / 350mA - 17W / 400mA - 19W / 450 / 500/ 550 / 600 / 700mA - 20W regulable Dali 1 & Dali 2



### OPTIONAL Power supply

Electrical

60.9592

Non dimmable continuous current power supply. 15-30W, 220/240V -50/60Hz with power current selected through adjustable switch. 350mA - 15W / 400mA - 17W / 450mA - 19W / 500mA - 22W / 550mA - 24W / 600mA - 26W / 650mA - 28W / 700mA - 30W.



### OPTIONAL Power supply

Electrical

60.9692

30W, 220-240V - 50/60Hz Constant current power supply, with dip-switch programmable power supply current.



### OPTIONAL Power supply

Electrical

60.9379

Mains Dimming, continuous current power supply 10W, 220/240V - 50/60Hz



### OPTIONAL Power supply

Electrical

60.9408

No dim continuous current power supply 13-20W, 220/240V - 50/60Hz



### OPTIONAL Power supply

Electrical

60.7785

Constant current power supply 42W, 220-240V CASAMBI dimmable.