


FLOS

SA.5202.5.120 Raw

Juncos Soft Plate 6L

Semi-recessed LED luminaire for indoor applications. Seamless integration in the architectural environment by Soft Architecture technology. Power supply not included.

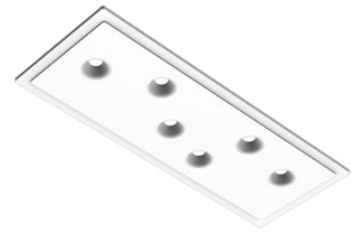

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location

Physical

Colour	Raw
Trim	No
Orientation	Fixed
Recessed depth (mm)	360
Net weight (kg)	5.8

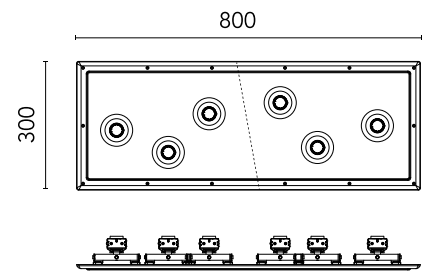

Photometric

Lighting type	Direct
Light distribution	Symmetric

Electrical

Emergency	No
-----------	----

Notes

Pre-wired product for serial connection to constant current.
Lighting Rods to be ordered separately.

Accessories & Power Supply



OPTIONAL Power supply

Electrical

60.8533

Continuous current power supply of 25W, 110/240V - 50/60Hz with power current selected through adjustable 350 mA-18W / 400 mA - 21W / 500mA - 25W /600mA - 30W /700/750/900 mA - 32W switch. 1-10V or push dimming, synchronisation cables not included.



OPTIONAL Power supply

Electrical

60.8534

Continuous current power supply. 230/240V - 50/60Hz. Adjustable Current 350mA - 17W / 500mA - 24W / 550mA - 25W / 700/ 750 mA - 32W switch by trailing and leading edge dimming, mains dimming or push dimming