

# FLOS

F6257000A Transparent

## KTribe Suspension 2

Designed by Philippe Starck, 2005




Halogen - 150W

Suspension lamp providing diffused light. PC (polycarbonate) inner diffuser, with opal white finish. Outer diffusers in transparent or fumée PMMA (polymethylmethacrylate), and silver or bronze on the inner surface, by vacuum aluminum coating. Three stainless steel cables, length 4000 mm for suspension of the diffuser assembly. White ceiling rose.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT



### Main specifications

|                        |                     |
|------------------------|---------------------|
| EAN                    | 8059607021422       |
| Mounting               | Suspension          |
| Environments           | Indoor dry location |
| Light source type      | Bulb                |
| Light sources included | No                  |
| Lamp category          | Halogen             |
| Lamp holders           | E27                 |
| Icos                   | HSGS                |
| Number of lamps        | 1                   |
| Power (W)              | 150                 |

### Physical

|                             |             |
|-----------------------------|-------------|
| Colour                      | Transparent |
| Length (mm)                 | 395         |
| Cord colour                 | Clear       |
| Cord length (mm)            | 2700        |
| Canopy colour               | White       |
| Canopy length/diameter (mm) | 114         |
| Canopy height (mm)          | 19          |
| Net weight (kg)             | 2.45        |
| Package height (mm)         | 420         |
| Package width (mm)          | 480         |
| Package length (mm)         | 480         |
| Package volume (m3)         | 0.1         |
| IP internal                 | 20          |

### Download

Mounting instructions [↓ PDF](#)

### Photometric Files

LDT / IES [↓ LDT](#)


### Technical Drawings

2D [↓ ZIP](#)

3D [↓ ZIP](#)



## Schematic light drawing



Beam Angle: 98°

| h(m) | E(lx) | D(m)  |
|------|-------|-------|
| 1    | 164   | 2.30  |
| 2    | 41    | 4.60  |
| 3    | 18    | 6.89  |
| 4    | 10    | 9.19  |
| 5    | 7     | 11.49 |

## Photometric

Light distribution Asymmetric

Extreme cut off No

## Electrical

Insulation class II

Frequency (Hz) 50/60


Main voltage (Vac) 220-250

Dimmable Yes

Dimming interface Remote Dimmable  
(Dimmer Not Included)

Batteries inside No

## Bulbs



NOT INCLUDED

RF30429

LED Opal Lamp E27 21W 2700K  
A65 Dimmable




NOT INCLUDED

RF26998

LED 21W E27 2450lm 3000K  
DIMMER

## Spare Parts

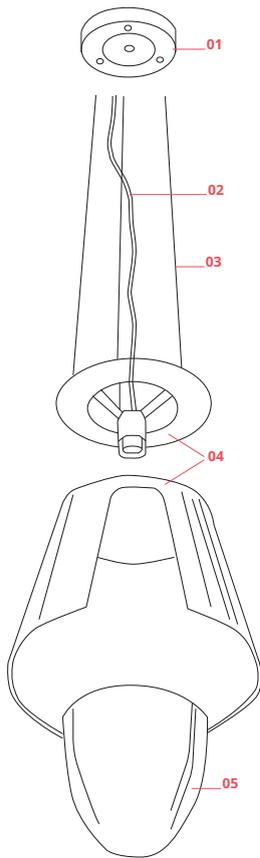

- |     |  |           |
|-----|--|-----------|
| 01. | Ktribe Suspension 2/ Suspension<br>3 ceiling rose assembly                   | RF6257001 |
| 02. | 5 meter sil/fep 2x0,75<br>transparent electrical cable                       | RF4190200 |
| 03. | Steel cable packed 3 pieces mt. 3  | RF29875   |
| 04. | Ktribe Suspension 2 Wiring<br>assembly and external diffuser<br>with support | RF6257004 |
| 05. | Ktribe Suspension 2 calibre<br>internal diffuser                             | RF19802   |



RF6257001  
Ktribe Suspension 2/ Suspension  
3 ceiling rose assembly



RF4190200  
5 meter sil/fep 2x0,75  
transparent electrical cable



RF29875  
Steel cable packed 3 pieces mt. 3



RF6257004  
Ktribe Suspension 2 Wiring  
assembly and external diffuser  
with support



RF19802  
Ktribe Suspension 2 calibre  
internal diffuser