

# FLOS

■ F0271000 Black

## Noctambule Suspension 3 Low Cylinder Cone

Designed by Konstantin Grcic, 2019




54W - 1545lm - 2700K - CRI> 90

Hanging lamps consisting of interconnecting glass modules reaching a length of 3,2 mt. (126.77") with 4 mt. (157.48") suspended power cable. Cylindrical and semi-spherical transparent blown glass structure, suspended die cast aluminium ring connector, hydroformed steel internal lateral arm and injection moulded optical opal silicone outer ring diffusers. The power supply unit within the ceiling rose can be used as a dimmer to adjust the light intensity by 10% to 100% in either direction by means of the 0-10/1-10V, PUSH, DALI control.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



### Main specifications

EAN	8059607000663
Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	54
Lumen Output (lm)	1545

### Physical

Colour	Black
Length (mm)	250
Cord colour	Black
Cord length (mm)	4000
Canopy colour	Black
Canopy length/diameter (mm)	187
Canopy height (mm)	45
Net weight (kg)	17.2
Package volume (m3)	0.33
IP internal	20

### Download


Mounting instructions	<a href="#">↓ PDF</a>
Mounting instructions	<a href="#">↓ PDF</a>
Mounting instructions	<a href="#">↓ PDF</a>

### Photometric Files


LDT / IES	<a href="#">↓ ZIP</a>
-----------	-----------------------

### Technical Drawings

3D	<a href="#">↓ ZIP</a>
Bim	<a href="#">↓ ZIP</a>

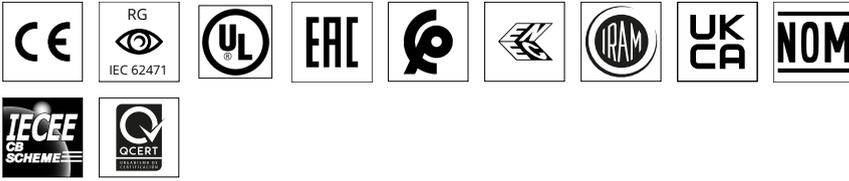

## Schematic light drawing



## Photometric

Lighting type	Total
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
Extreme cut off	No

## Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	120-277
Power supply	Integrated
Dimmable	Yes
Power supply type	Dimmable 0-10V, Dimmable 1-10V, Dimmable DALI 1, Dimmable Push
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

## Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E



## Spare Parts

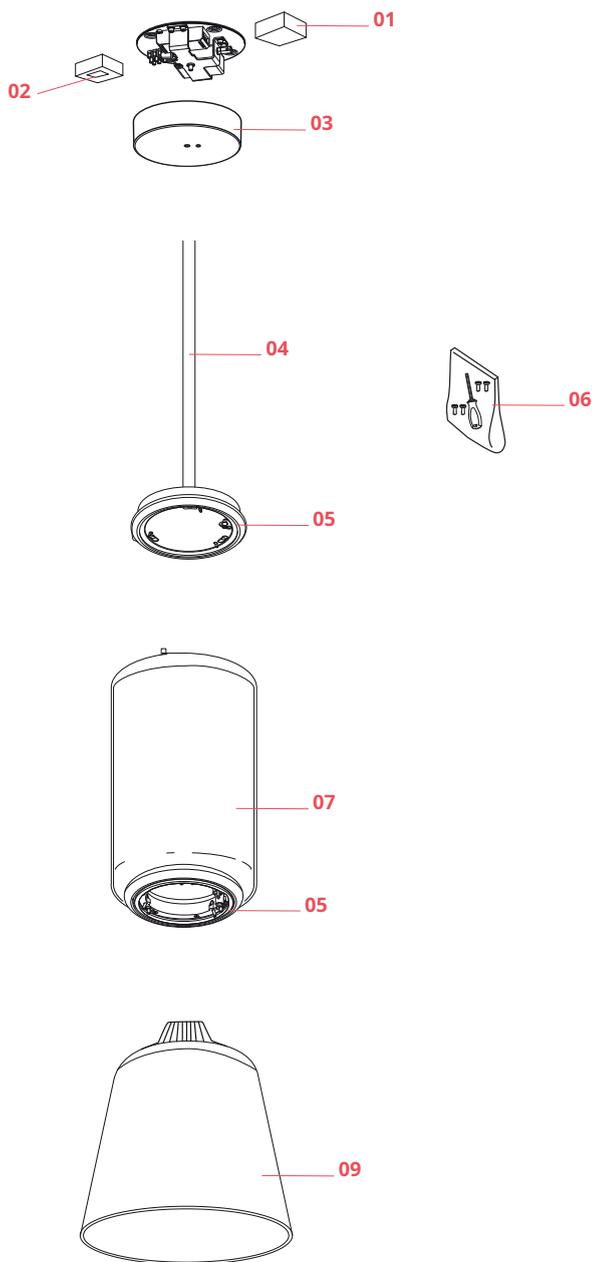

00.	Push button and cables assembly for dimmer	RF27318
01.	Power supply kit for Arrangements small & Noctambule	RF0410500
02.	Led dimmer kit	RF34197
03.	Noctambule ceiling rose cover	RF27422
04.	Noctambule Suspension attack	F0253030
05.	Ring led diffuser	RF27498
06.	Fixing screws kit	RF0254100
07.	Noctambule Low Cylinder	F0254000
09.	Noctambule Cone	F0260000



RF27318  
Push button and cables assembly  
for dimmer



RF0410500  
Power supply kit for  
Arrangements small &  
Noctambule



RF34197  
Led dimmer kit



RF27422  
Noctambule ceiling rose cover



F0253030  
Noctambule Suspension attack



RF27498  
Ring led diffuser



RF0254100  
Fixing screws kit



F0254000  
Noctambule Low Cylinder



F0260000

Noctambule Cone