

# FLOS

 F0281000 Black

## Noctambule Suspension 5 High Cylinder


Designed by Konstantin Grcic, 2019

54W - 1798lm - 2700K

Hanging lamps consisting of interconnecting glass modules reaching a length of 3,2 mt. (126.77") with 4 mt. (157.48") suspended power cable. Cylindrical and semi-spherical transparent blown glass structure, suspended die cast aluminium ring connector, hydroformed steel internal lateral arm and injection moulded optical opal silicone outer ring diffusers. The power supply unit within the ceiling rose can be used as a dimmer to adjust the light intensity by 10% to 100% in either direction by means of the 0-10V/1-10V, PUSH, DALI control.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



### Main specifications

|                        |                     |
|------------------------|---------------------|
| EAN                    | 8059607000762       |
| Mounting               | Suspension          |
| Environments           | Indoor dry location |
| Light source type      | LED                 |
| Light sources included | Yes                 |
| LED type               | LED Module          |
| Power (W)              | 54                  |
| Lumen Output (lm)      | 1798                |

### Physical

|                             |       |
|-----------------------------|-------|
| Colour                      | Black |
| Length (mm)                 | 250   |
| Cord colour                 | Black |
| Canopy colour               | Black |
| Canopy length/diameter (mm) | 187   |
| Canopy height (mm)          | 45    |
| Net weight (kg)             | 22.9  |
| Package volume (m3)         | 0.41  |
| IP internal                 | 20    |

### Download

|                       |                              |
|-----------------------|------------------------------|
| Mounting instructions | <a href="#">Download PDF</a> |
| Mounting instructions | <a href="#">Download PDF</a> |
| Mounting instructions | <a href="#">Download PDF</a> |

### Photometric Files


|           |                              |
|-----------|------------------------------|
| LDT / IES | <a href="#">Download ZIP</a> |
|-----------|------------------------------|

### Technical Drawings

|     |                              |
|-----|------------------------------|
| 3D  | <a href="#">Download ZIP</a> |
| Bim | <a href="#">Download ZIP</a> |



Schematic light drawing



Photometric

|                    |           |
|--------------------|-----------|
| Lighting type      | Total     |
| Light distribution | Symmetric |
| CCT (K)            | 2700      |
| Extreme cut off    | No        |

Electrical

|                    |                                                                         |
|--------------------|-------------------------------------------------------------------------|
| Insulation class   | I                                                                       |
| Frequency (Hz)     | 50/60                                                                   |
| Main voltage (Vac) | 120-277                                                                 |
| Power supply       | Integrated                                                              |
| Dimmable           | Yes                                                                     |
| Power supply type  | Dimmable 0-10V,<br>Dimmable 1-10V,<br>Dimmable DALI 1,<br>Dimmable Push |
| Dimming interface  | Remote Dimmable<br>(Dimmer Not<br>Included)                             |
| Batteries inside   | No                                                                      |

Ecodesign and Energy Labelling


This product contains a light source of energy efficiency class E



Replaceable (LED only)  
light source by a  
professional

Replaceable control  
gear by a professional

Spare Parts

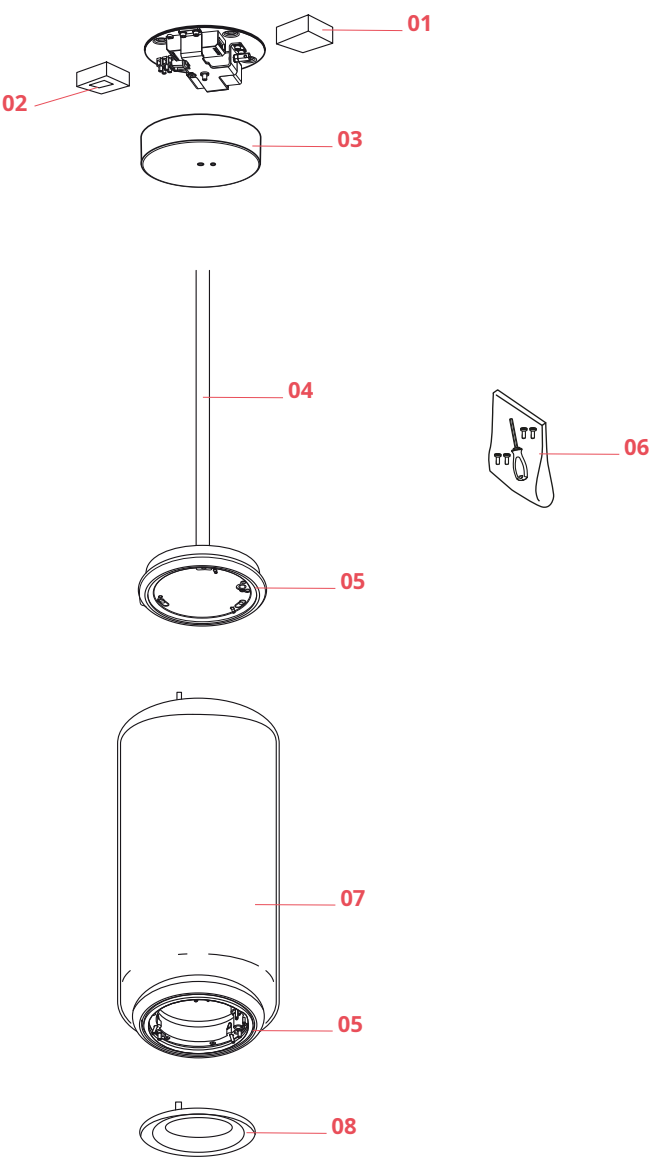

- 00. Push button and cables assembly for dimmer RF27318
- 01. Power supply kit for Arrangements small & Noctambule RF0410500
- 02. Led dimmer kit RF34197
- 03. Noctambule ceiling rose cover RF27422
- 04. Noctambule Suspension attack F0253030
- 05. Ring led diffuser RF27498
- 06. Fixing screws kit RF0254100
- 07. Noctambule High Cylinder F0257000
- 08. Noctambule Suspension Terminal ring F0258030



RF27318

Push button and cables assembly  
for dimmer



RF0410500

Power supply kit for  
Arrangements small &  
Noctambule



RF34197

Led dimmer kit



RF27422

Noctambule ceiling rose cover



F0253030

Noctambule Suspension attack



RF27498

Ring led diffuser



RF0254100

Fixing screws kit



F0257000

Noctambule High Cylinder



F0258030

Noctambule Suspension Terminal  
ring