

# FLOS

 F0282000 Black

## Noctambule Suspension 6 High Cylinder

Designed by Konstantin Grcic, 2019


63W - 2096lm - 2700K



Hanging lamps consisting of interconnecting glass modules reaching a length of 3,2 mt. (126.77") with 4 mt. (157.48") suspended power cable. Cylindrical and semi-spherical transparent blown glass structure, suspended die cast aluminium ring connector, hydroformed steel internal lateral arm and injection moulded optical opal silicone outer ring diffusers. The power supply unit within the ceiling rose can be used as a dimmer to adjust the light intensity by 10% to 100% in either direction by means of the 0-10V/1-10V, PUSH, DALI control.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



### Main specifications

|                        |                     |
|------------------------|---------------------|
| EAN                    | 8059607000779       |
| Mounting               | Suspension          |
| Environments           | Indoor dry location |
| Light source type      | LED                 |
| Light sources included | Yes                 |
| LED type               | LED Module          |
| Power (W)              | 63                  |
| Lumen Output (lm)      | 2096                |

### Physical

|                             |       |
|-----------------------------|-------|
| Colour                      | Black |
| Length (mm)                 | 250   |
| Cord colour                 | Black |
| Canopy colour               | Black |
| Canopy length/diameter (mm) | 187   |
| Canopy height (mm)          | 45    |
| Net weight (kg)             | 26.9  |
| Package volume (m3)         | 0.48  |
| IP internal                 | 20    |

### Download

|                       |                              |
|-----------------------|------------------------------|
| Mounting instructions | <a href="#">Download PDF</a> |
| Mounting instructions | <a href="#">Download PDF</a> |
| Mounting instructions | <a href="#">Download PDF</a> |

### Photometric Files


|           |                              |
|-----------|------------------------------|
| LDT / IES | <a href="#">Download ZIP</a> |
|-----------|------------------------------|

### Technical Drawings

|     |                              |
|-----|------------------------------|
| 3D  | <a href="#">Download ZIP</a> |
| Bim | <a href="#">Download ZIP</a> |



Schematic light drawing



Photometric

|                    |           |
|--------------------|-----------|
| Lighting type      | Total     |
| Light distribution | Symmetric |
| CCT (K)            | 2700      |
| Extreme cut off    | No        |

Electrical

|                    |                                                                         |
|--------------------|-------------------------------------------------------------------------|
| Insulation class   | I                                                                       |
| Frequency (Hz)     | 50/60                                                                   |
| Main voltage (Vac) | 120-277                                                                 |
| Power supply       | Integrated                                                              |
| Dimmable           | Yes                                                                     |
| Power supply type  | Dimmable 0-10V,<br>Dimmable 1-10V,<br>Dimmable DALI 1,<br>Dimmable Push |
| Dimming interface  | Remote Dimmable<br>(Dimmer Not<br>Included)                             |
| Batteries inside   | No                                                                      |

Ecodesign and Energy  
Labelling


This product contains a light  
source of energy efficiency  
class E



Replaceable (LED only)  
light source by a  
professional

Replaceable control  
gear by a professional

Spare Parts

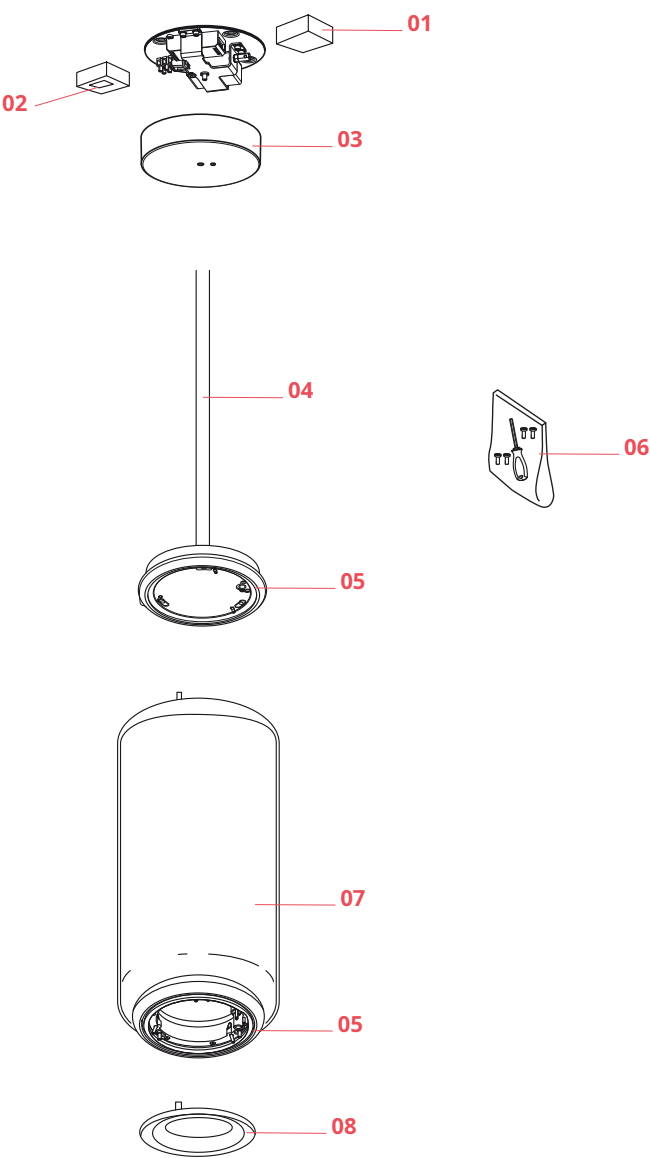

- |     |                                                      |           |
|-----|------------------------------------------------------|-----------|
| 00. | Push button and cables assembly for dimmer           | RF27318   |
| 01. | Power supply kit for Arrangements small & Noctambule | RF0410500 |
| 02. | Led dimmer kit                                       | RF34197   |
| 03. | Noctambule ceiling rose cover                        | RF27422   |
| 04. | Noctambule Suspension attack                         | F0253030  |
| 05. | Ring led diffuser                                    | RF27498   |
| 06. | Fixing screws kit                                    | RF0254100 |
| 07. | Noctambule High Cylinder                             | F0257000  |
| 08. | Noctambule Suspension Terminal ring                  | F0258030  |



RF27318  
Push button and cables assembly  
for dimmer



RF0410500  
Power supply kit for  
Arrangements small &  
Noctambule



RF34197  
Led dimmer kit



RF27422  
Noctambule ceiling rose cover



F0253030  
Noctambule Suspension attack



RF27498  
Ring led diffuser



RF0254100  
Fixing screws kit



F0257000  
Noctambule High Cylinder



F0258030

Noctambule Suspension Terminal  
ring