

FLOS

06.2603.14 Black


Profile 1000mm Non Dimmable

Designed by FLOS Architectural, 2023



Wall surface, Ceiling surface

Interior electromechanical profile (24Vdc) from 1 to 3m long for wall or ceiling installation, fastened with special screws and plugs provided with the profile. Request power connectors, intermediate connectors and covers separately. Feed unit joints available in the form of L, T and X in the same plane. It also has a linear electric connector for joining two track sections in the same plane and a 90° electromechanical connector for joining profile sections in different planes (interior wall-wall, ceiling-wall). Aesthetic covers for the inner profile gap available as an option.

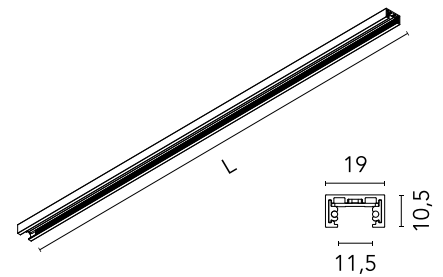

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

| | |
|------------------------|-------------------------------|
| Mounting | Wall surface, Ceiling surface |
| Environments | Indoor dry location |
| Light sources included | No |

Physical

| | |
|-----------------|-------|
| Colour | Black |
| Net weight (kg) | 0.3 |
| IP internal | 20 |

Download

[Mounting instructions](#)



Electrical

| | |
|---------------------|---|
| Insulation class | III |
| Forward voltage (V) | 24 |
| Power supply | Remote excluded |
| Dimmable | No |
| Power supply type | Non Dimmable |
| Dimming interface | Remote Dimmable (Dimmer Not Included) |

Accessories & Power Supply



REQUIRED
Connector

Electrical

06.2613.14

Live End Feed Non Dimmable



REQUIRED
Power supply

Electrical

60.9352

LED power supply source for remote installation in 24V/200W electric control panel. To avoid problems of overload it is recommended to install a power source every 185W. 100/240V.



REQUIRED
Corner

06.2610.14

Inner Corner



REQUIRED
Power supply

Electrical

60.9777A

Remote Power Supply Non Dimmable 24V. 120W. 220/240V



REQUIRED
Corner

Electrical

06.2614.14

90° Corner Feed Non Dimmable



REQUIRED
Component

Installation

06.2617.14


Blind End



REQUIRED
Power supply

06.2619.14


Power Supply Surface End Dimmable / Non Dimmable



REQUIRED
Power supply

06.2620.14

Power Supply Surface Middle Dimmable / Non Dimmable



REQUIRED
Connector

Electrical

06.2621.14

Linear Connector Feed - Non Dimmable

REQUIRED
Power supply

Electrical

60.9705A

Remote Power Supply Non Dimmable 24V. 60W. 220/240V

OPTIONAL
Power supply

Electrical

08.0613.14A

Dimmable control box 1-10V, 24/48V. For remote installation.

OPTIONAL
Connector

Electrical

06.2608.14

Straight Connector