

# FLOS


F6394003 Blue Tourmaline

## Skynest Motion

Designed by Marcel Wanders, Marcel Wanders studio, 2022

57W - 1385lm - 2700-2900K - CRI > 90

Diffuse lighting hanging appliance. The dome is a combination of luminous and dark elements arranged into a network and formed of core structures covered with a thin interwoven colourful tubular mesh made from recycled and recyclable fabric produced from polyester. Every single luminous element is powered by special micro-connectors located at the top of the dome and is covered with a two-tone mesh, while the side facing the inside of the dome is always white in order to allow for optimal light emission from the LED module. The appliance is fitted with a built-in balancing system at the top of the dome which helps adjust its balance, making it perfectly stable. The bottom of the dome is completed by an aluminium ring that keeps the dome's entire network structure in place through a simple snap-fit system. The product is assembled with absolutely no glue so it can be fully separated to be recycled in the future and in case of any repairs or replacements. Available lamp finishes: Blue Tourmaline, Almond, Anthracite or Brick Red. Plastic structure painted with the same finish as the lamp, fitted with built-in electronics and dimmer.

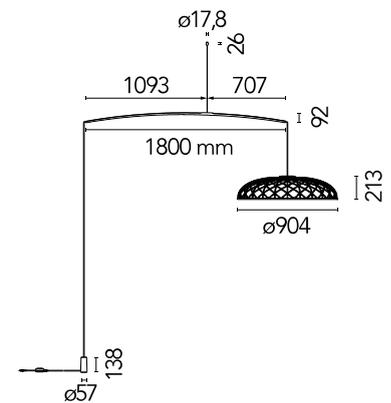

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

EAN	8059607057193
Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	57
System power (W)	57
Lumen Output (lm)	1385

### Physical

Colour	Blue Tourmaline
Length (mm)	2300
Cord colour	Light Blue
Cord length (mm)	6000
Canopy colour	Blue Tourmaline
Canopy length/diameter (mm)	18
Canopy height (mm)	25
Net weight (kg)	6
Package volume (m3)	0.33
IP internal	20

### Download

[Mounting instructions](#)  PDF

### Photometric Files

[LDT / IES](#)  ZIP


### Technical Drawings

[2D](#)  ZIP

[3D](#)  ZIP



## Schematic light drawing



Beam Angle: 110°

h(m)	E(lx)	D(m)
1	379	2.84
2	95	5.68
3	42	8.53
4	24	11.37
5	15	14.21

Luminous flux luminaire  
1385 lm

## Photometric


Lighting type	Total
Light distribution	Symmetric
CCT (K)	2700-2900
CRI>	90
Extreme cut off	No

## Electrical


Insulation class	III
Main voltage (Vac)	100-240
Power supply	Integrated
Dimmable	Yes
Power supply type	Electronic 48V
Dimming interface	Dimmer Integrated
Plug type	Type A, Type C, Type G

## Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F




Replaceable (LED only) light source by an end-user



Replaceable control gear by an end-user

## Spare Parts

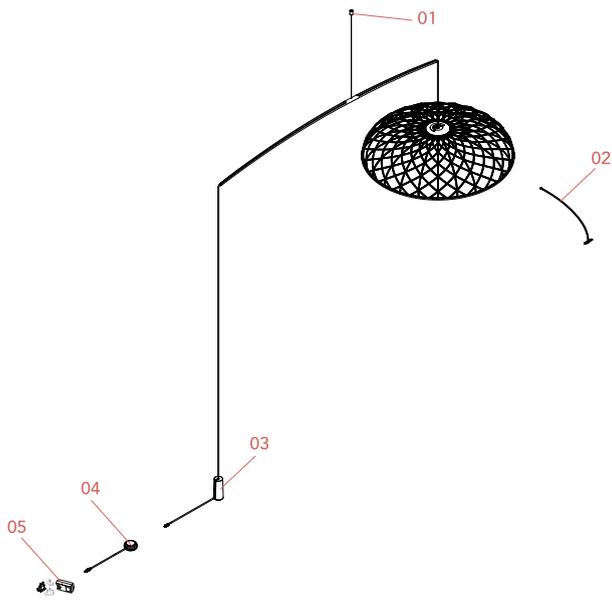

- |     |   |           |
|-----|---|-----------|
| 01. | Skynest Motion – Light blue ceiling rose and steel cable assembly | RF6391003 |
| 02. | Assembly Led Arm for Skynest Suspension Blue Tourmaline           | RF34718   |
| 03. | Skynest Motion Light blue counterweight                           | RF35048   |
| 04. | Skynest Motion Light blue emc dimmer assembly                     | RF37532   |
| 05. | Black plug assembly kit & 48V driver                              | RF6600130 |



RF6391003  
Skynest Motion – Light blue ceiling rose and steel cable assembly



RF34718  
Assembly Led Arm for Skynest Suspension Blue Tourmaline



RF35048  
Skynest Motion Light blue emc counterweight



RF37532  
Skynest Motion Light blue emc dimmer assembly



RF6600130  
Black plug assembly kit & 48V driver