

FLOS

F1366009 White

Smithfield Ceiling Pro

Designed by Jasper Morrison, 2009




45W - 2791lm - 2700K - CRI> 95

Ceiling-mounted lamp providing direct light. Aluminium body. Available in gloss black, white, matt black, red, green or MUD. Injection-moulded opalescent methacrylate diffuser. Steel wall and ceiling attachment.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

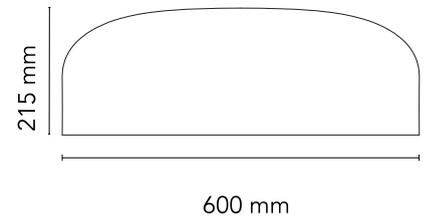

Main specifications

| | |
|------------------------|---------------------|
| EAN | 8059607014875 |
| Mounting | Ceiling |
| Environments | Indoor dry location |
| Light source type | LED |
| Light sources included | Yes |
| LED type | LED Module |
| Power (W) | 45 |
| Lumen Output (lm) | 2791 |

Physical

| | |
|---------------------|-------|
| Colour | White |
| Length (mm) | 600 |
| Net weight (kg) | 5.8 |
| Package height (mm) | 310 |
| Package width (mm) | 710 |
| Package length (mm) | 710 |
| Package volume (m3) | 0.16 |
| IP internal | 20 |

Download

[Mounting instructions](#)  PDF

Photometric Files


[LDT / IES](#)  LDT

Technical Drawings


[2D](#)  ZIP

[3D](#)  ZIP

[Bim](#)  ZIP

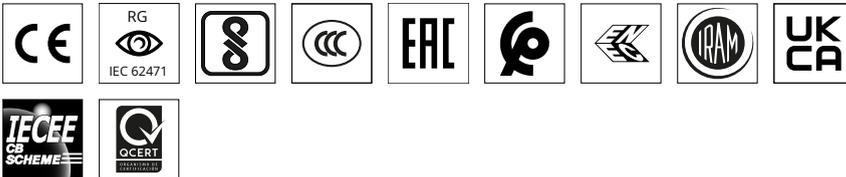

Schematic light drawing



Photometric


| | |
|--------------------|----------------|
| Light distribution | Roto symmetric |
| CCT (K) | 2700 |
| CRI> | 95 |
| Extreme cut off | No |

Electrical


| | |
|--------------------|---------------|
| Insulation class | I |
| Frequency (Hz) | 50/60 |
| Main voltage (Vac) | 200-240 |
| Power supply | Integrated |
| Power supply type | Dimmable Push |
| Batteries inside | No |

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F

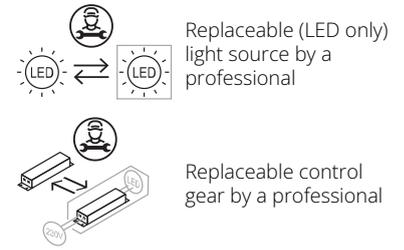

Spare Parts

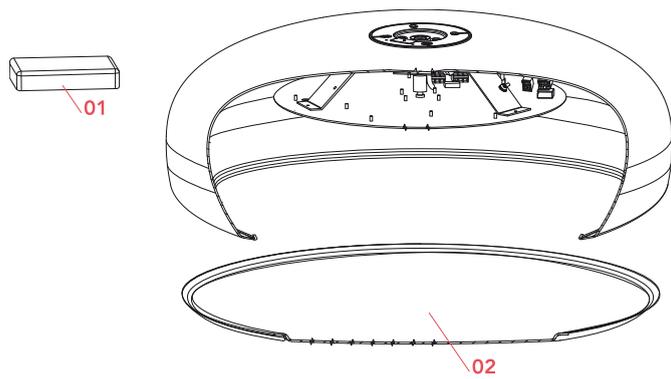

- | | | |
|-----|---|---------|
| 01. | Smithfield Ceiling Driver 45W 450-1050mA | RF31980 |
| 02. | Methacrylate diffuser | RF19022 |



RF31980
Smithfield Ceiling Driver 45W 450-1050mA



RF19022
Methacrylate diffuser