

Smithfield Suspension Pro dimmable DALI

Designed by Jasper Morrison, 2009



45W - 2791lm - 2700K

Suspension lamp with direct light. Aluminium body. Available in gloss black, white, matt black, green, red or MUD. Injection-moulded opalescent methacrylate diffuser. Steel ceiling attachment with steel suspension cable, 5 pole electric cable in PTFE double insulation, working length 2700 mm. Control DALI dimmable.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

EAN	8059607015117
Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	45
Lumen Output (lm)	2791

Physical

Colour	White
Length (mm)	600
Cord colour	Clear
Cord length (mm)	2700
Canopy colour	White
Canopy length/diameter (mm)	146
Canopy height (mm)	36
Net weight (kg)	5.8
Package height (mm)	310
Package width (mm)	710
Package length (mm)	710
Package volume (m3)	0.16
IP internal	20



Download

Mounting instructions [↓ PDF](#)

Photometric Files


LDT / IES [↓ LDT](#)

Technical Drawings


2D [↓ ZIP](#)

3D [↓ ZIP](#)

[Bim](#) [↓ ZIP](#)

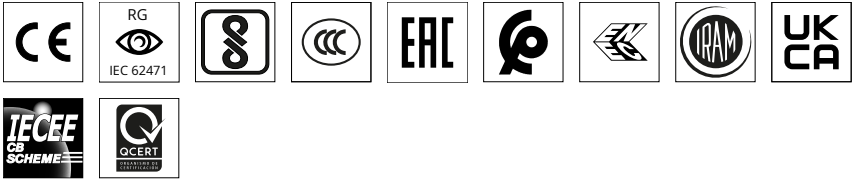

Schematic light drawing



Photometric


Light distribution	Roto symmetric
CCT (K)	2700
Extreme cut off	No

Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	200-240
Power supply	Integrated
Dimmable	Yes
Power supply type	Dimmable DALI 1
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F

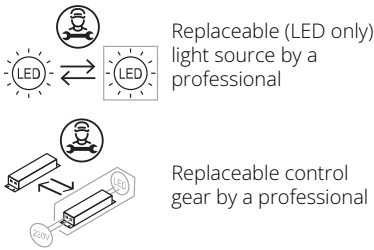

Spare Parts

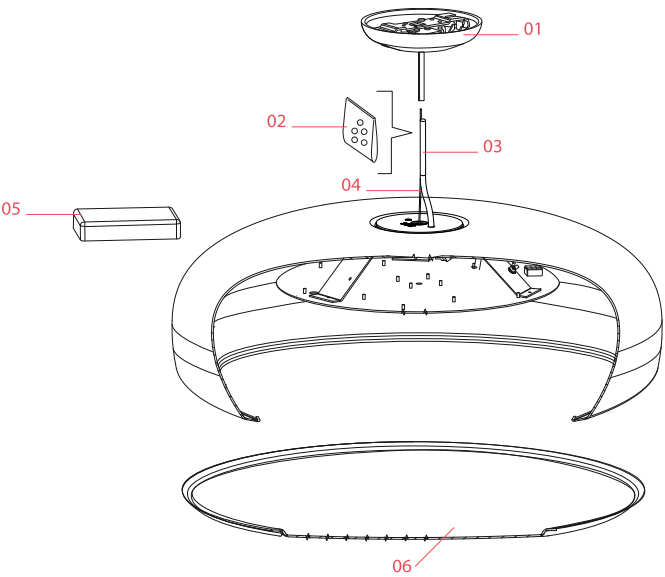

- | | | |
|-----|----------------------------------|-----------|
| 01. | White rose assembly | RA3690209 |
| 02. | Kit of 5 or rings | RF05382 |
| 03. | Smithfield Suspension 2,7mt | RF29934 |
| | fep/pvc 5x0,75 transparent cable | |
| 04. | 3 mt steel cable ø1,2 with 19 | RF29665 |
| | winded wires | |
| 05. | Driver 60W 500-1400mA 200- | RF31674 |
| | 240V | |
| 06. | Methacrylate diffuser | RF19022 |



RA3690209

White rose assembly



RF05382

Kit of 5 or rings

RF29934

Smithfield Suspension 2,7mt
fep/pvc 5x0,75 transparent cable



RF29665

3 mt steel cable $\varnothing$ 1,2 with 19
winded wires



RF31674

Driver 60W 500-1400mA 200-
240V



RF19022

Methacrylate diffuser