

FLOS

F6630057 Chrome

Superloon


Designed by Jasper Morrison, 2015

48W - 2716lm - 2200-2800K

Adjustable floor lamp providing direct light. Painted or chrome-plated aluminium body with metal spinning head, die-cast joints and extruded stem. Silk screened PMMA diffuser. Edge Lighting technology light source. Optical switch sensor placed on the stem that provide Warm Tone dimming function. Power cord length 250 cm. Plug-in power supply with interchangeable plugs.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



Main specifications

EAN	8059607007037
Mounting	Floor
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	48
Lumen Output (lm)	2716

Physical

Colour	Chrome
Length (mm)	754
Cord colour	Black
Net weight (kg)	11
Package volume (m3)	0.11
IP internal	20



Download

Mounting instructions	PDF
Mounting instructions	PDF


Photometric Files

LDT / IES	LDT
-----------	---------------------

Technical Drawings

2D	ZIP
3D	ZIP

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Roto symmetric
CCT (K)	2200-2800
Extreme cut off	No

Electrical

Insulation class	III
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Power supply	Remote included
Dimmable	Yes
Power supply type	Electronic 48V
Dimming interface	Dimmer Integrated
Plug type	Type A, Type C, Type G
Batteries inside	No


Ecodesign and Energy

Labelling

This product contains a light source of energy efficiency class D




Replaceable (LED only) light source by a professional



Replaceable control gear by an end-user

Spare Parts

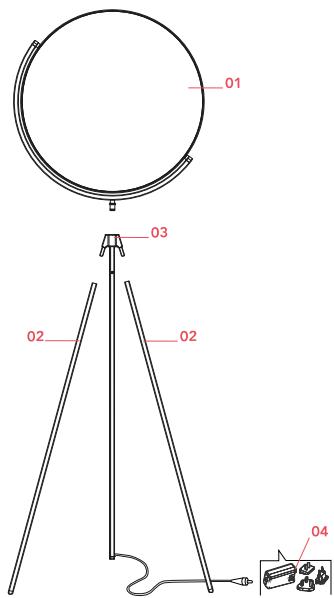

01.	Superloon Chrome diffuser	F6632057
02.	Superloon Mobile legs	RF25119
03.	Superloon Chrome electrified fixed leg	RF6630257
04.	Black plug assembly kit & 48V driver	RF6600130



F6632057

Superloon Chrome diffuser



RF25119

Superloon Mobile legs



RF6630257

Superloon Chrome electrified
fixed leg



RF6600130

Black plug assembly kit & 48V
driver