

FLOS

 F6564030 Black

Tab Floor

Designed by Edward Barber and Jay Osgerby, 2011

9W - 347lm - 2700K - CRI> 90



Floor luminaire providing direct lighting with adjustable head. Body in painted pressofused aluminium. Multi-led diffuser in specially designed PMMA to avoid the Multi Shadow effect and dazzle. Head rotation $\pm 90^\circ$.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

Main specifications

EAN	8059607006573
Mounting	Floor
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	9
Lumen Output (lm)	347

Physical

Colour	Black
Length (mm)	240
Cord colour	Black
Net weight (kg)	1.9
Package height (mm)	160
Package width (mm)	330
Package length (mm)	1210
Package volume (m3)	0.06
IP internal	20



Download

[Mounting instructions](#)  PDF

[Mounting instructions](#)  PDF

Photometric Files

[LDT / IES](#)  LDT


Technical Drawings

[2D](#)  ZIP

[3D](#)  ZIP



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Asymmetric
CCT (K)	2700
CRI>	90
Extreme cut off	No

Electrical

Insulation class	III
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Power supply	Remote included
Dimmable	No
Power supply type	Electronic 24V
Dimming interface	Switch Integrated (Not Dimmable)
Plug type	Type A, Type C, Type G
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D




Replaceable (LED only) light source by a professional



Replaceable control gear by an end-user

Spare Parts

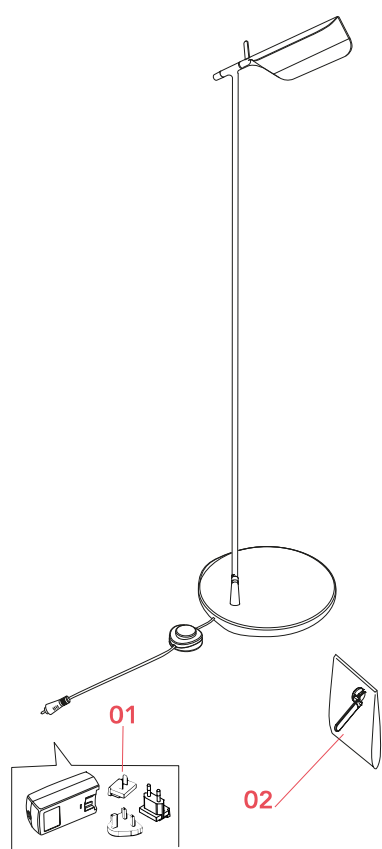

- | | | |
|-----|--------------------------------------|-----------|
| 01. | Black plug assembly kit & 24V driver | RF6600230 |
| 02. | Locking key tool | RF13905 |



RF6600230

Black plug assembly kit & 24V
driver



RF13905

Locking key tool