

# FLOS

FA523223 Transparent

## Tau L 554


Designed by FLOS Outdoor



LED light source included. Screw connector at the tube's end. 24V dc remote electric power supply and individual or series feeding cables, to be ordered separately. Transparent polycarbonate diffuser. Adjustable light intensity.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

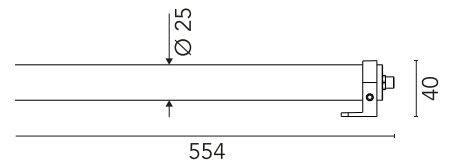

### Main specifications

EAN	8054793640488
Mounting	Ceiling, Wall
Environments	Outdoor wet location
LED type	Power LED
Power (W)	5
System power (W)	5
Source flux (lm)	420
Lumen Output (lm)	384

### Physical

Colour	Transparent
Orientation	Fixed
Net weight (kg)	0.41
Package height (mm)	720
Package width (mm)	73
Package length (mm)	73
IP internal	65

### Download

Mounting instructions [↓ ZIP](#)

### Photometric Files

LDT / IES [↓ ZIP](#)

### Technical Drawings

2D [↓ ZIP](#)


3D [↓ ZIP](#)



### Ecodesign and Energy Labelling



## Schematic light drawing



Beam Angle: 111°

h(m)	E(lx)	D(m)
1	145	2.90
2	36	5.80
3	16	8.70
4	9	11.59
5	6	14.49

Luminous flux luminaire  
384 lm

### Photometric

Light distribution	Symmetric
CCT (K)	2700
CRI>	80
Beam angle C0-180 (°)	110
Beam angle C90-270 (°)	108
Extreme cut off	No

### Electrical

Insulation class	III
Main voltage (Vac)	24
Power supply	Remote excluded
Power supply type	Non Dimmable, Dimmable 1-10V, Dimmable DALI 1
Emergency	No

### Notes

Please check with your referent person in our Front Office if a code modification is needed to meet the required certification compliance

## Accessories & Power Supply



REQUIRED  
Accessory

FA172

Supply Cable Tau Tube L 2000  
mm Single Connector



OPTIONAL  
Power supply

RF25757

Power supply 24V 10W / 110-  
240V IP67 Class II selv.\_Non  
Dimmable



OPTIONAL  
Power supply

RF25752

Power supply 24Vdc 20W / 220-  
240V IP67 Class II selv. Non  
Dimmable



OPTIONAL  
Power supply

RF25747

Power supply 24V 10W /110-240V  
IP20 Class II selv. Non Dimmable



OPTIONAL  
Power supply

RF25750

Power supply 24Vdc 17W / 110-  
240V (15W@110V) IP20 Class II  
selv. Dimmable Push-Dimm Or  
1.10V



OPTIONAL  
Power supply

RF25748

Power Supply dual function C.V.  
Vout 24Vdc 8W, Vin 220±240V  
C.C. Iout 350mA: 8W, Vin  
220±240V IP 65 Class II Selv. NON  
Dimmable



OPTIONAL  
Power supply

F990B21A000

Power supply 17W/110±240V  
-24Vdc (15W@110V) IP67 Class II  
Selv. Dimmable Push-Dimm Or  
1.10V



OPTIONAL  
Accessory

FA173

Supply Cable Tau Tube L 80 mm  
Double Connector



OPTIONAL  
Accessory

FA174

Supply Cable Tau Tube L 200 mm  
Double Connector



OPTIONAL

F990B34A000

Power Supply dual function C.V.  
Vout 24Vdc 8W, Vin 220÷240V  
C.C. Iout 350mA: 8W, Vin  
220÷240V IP 20 Class II Selv. NON  
Dimmable



OPTIONAL  
Power supply

F990B27A000

Power supply 24Vdc 70W / 220-  
240V IP67 Class I selv. Non  
Dimmable



OPTIONAL  
Power supply

F990B28A000

Power supply 24Vdc 50W / 220-  
240V IP67 Class I selv. Non  
Dimmable



OPTIONAL  
Power supply

F990B29A000

Power supply 24Vdc 100W / 220-  
240V IP67 Class I selv. Non  
Dimmable