

FLOS

06.1852.14 Black


The Fast Track Recessed Profile

Designed by FLOS Architectural, 2017



Length: 2000 - Wall recessed, Ceiling recessed

Electro-mechanical profile for recessed installations in plasterboard ceilings, with 1m to 3m lengths. Power and interconnection cables must be ordered separately. The covers must be ordered separately. Fixed or adjustable fastening kits available (optional). The roof fastening kits enable installation without the need for aluminium TC fastening profiles.

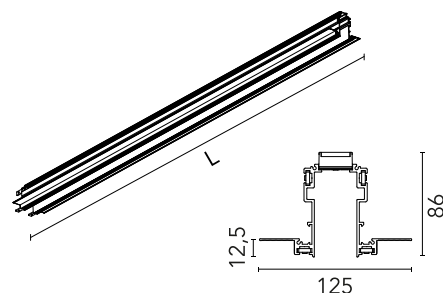

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Wall recessed, Ceiling recessed
Environments	Indoor dry location

Physical

Colour	Black
Trim	No
Length (mm)	2000
Net weight (kg)	5.6

Download

[Mounting instructions](#)  ZIP



Electrical

Forward voltage (V)	48
Power supply	Remote excluded
Emergency	No

Accessories & Power Supply



REQUIRED
Power supply

Electrical

60.8919

LED Power Supply Source for remote installation. 48V/320W. 100/240 Vac



REQUIRED
Component

06.0303.00

Power feed cable



REQUIRED
Power supply

Electrical

60.9170

LED power supply source for remote installation, 48V/120W. 220/240 Vac



REQUIRED
Power supply

Electrical

60.9607

LED power supply source for remote installation, 110Vac-150W / 220Vac-200W



REQUIRED
Component

08.9070.14

The Fast Track Recessed Profiles End Caps. 2 unit kit



OPTIONAL
Accessory

Installation

60.3097.14

1 m suspension rod extension set with m6 thread



OPTIONAL

Installation

08.8867.14

Adjustable ceiling kit. 2 unit kit



OPTIONAL

Installation

08.8866.14

Fixed ceiling kit. 2 unit kit



OPTIONAL

Electrical

06.1987.14

Multifunction Smart Device for Running Magnet & Fast Track



OPTIONAL
Accessory

Installation

60.3097.11

1 m suspension rod with ceiling rose with m6 thread




OPTIONAL

Electrical

06.1987.40

Multifunction Smart Device for Running Magnet & Fast Track



OPTIONAL
Component

06.0301.00

Connection cable. Electrical and data connection



OPTIONAL
Component

08.9074.14

The Fast Track Recessed-Surface Stopper