

# FLOS

06.1860.40 White

## The Fast Track Surface Profile

Designed by FLOS Architectural, 2017




Length: 1000 - Ceiling surface

Electro-mechanical profile for surface installations in plasterboard ceilings, with 1m to 3m lengths. Not suitable for suspended installations. Power and interconnection cables must be ordered separately. Covers must be ordered separately. Fixed ceiling kit included.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

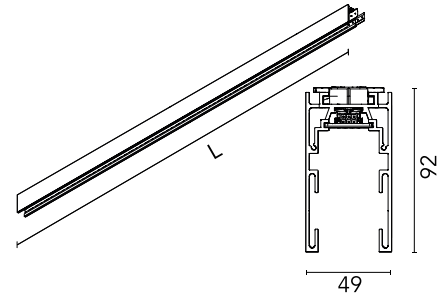

### Main specifications

Mounting	Ceiling surface
Environments	Indoor dry location

### Physical

Colour	White
Trim	No
Length (mm)	1000
Net weight (kg)	2.8

### Download

<a href="#">Mounting instructions</a>	<a href="#">↓ ZIP</a>
<a href="#">Item information</a>	<a href="#">↓ JPG</a>



### Electrical

Forward voltage (V)	48
Power supply	Remote excluded
Emergency	No

## Accessories & Power Supply



REQUIRED  
Power supply

Electrical

60.8919

LED Power Supply Source for remote installation. 48V/320W. 100/240 Vac



REQUIRED  
Component

06.0303.00

Power feed cable



REQUIRED  
Component

08.9071.14

The Fast Track Surface Profiles End Caps. 2 unit kit



REQUIRED  
Power supply

Electrical

60.9170

LED power supply source for remote installation, 48V/120W. 220/240 Vac



REQUIRED  
Power supply

Electrical

60.9607


LED power supply source for remote installation, 110Vac-150W / 220Vac-200W



REQUIRED  
Component

08.9071.40

The Fast Track Surface Profiles End Caps. 2 unit kit



OPTIONAL  
Component

06.0301.00

Connection cable. Electrical and data connection



OPTIONAL  
Component

08.9074.14

The Fast Track Recessed-Surface Stopper



OPTIONAL

Electrical

06.1987.14

Multifunction Smart Device for  
Running Magnet & Fast Track



OPTIONAL

Electrical

06.1987.40

Multifunction Smart Device for  
Running Magnet & Fast Track