


FLOS

06.1861.14 Black

The Fast Track Surface Profile

Designed by FLOS Architectural, 2017

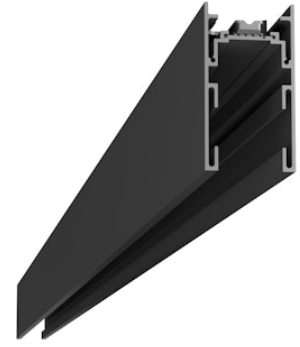


Length: 1500 - Ceiling surface

Electro-mechanical profile for surface installations in plasterboard ceilings, with 1m to 3m lengths. Not suitable for suspended installations. Power and interconnection cables must be ordered separately. Covers must be ordered separately. Fixed ceiling kit included.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

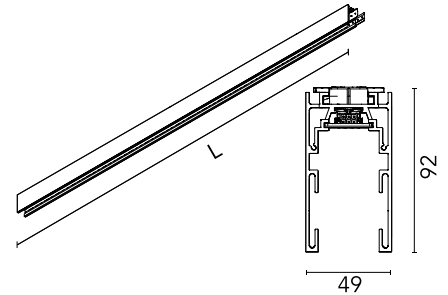

Main specifications

| | |
|--------------|---------------------|
| Mounting | Ceiling surface |
| Environments | Indoor dry location |

Physical

| | |
|-----------------|-------|
| Colour | Black |
| Trim | No |
| Length (mm) | 1500 |
| Net weight (kg) | 4.2 |

Download

| | |
|---------------------------------------|---------------------|
| Mounting instructions | ZIP |
| Item information | JPG |



Electrical

| | |
|---------------------|-----------------|
| Forward voltage (V) | 48 |
| Power supply | Remote excluded |
| Emergency | No |

Accessories & Power Supply



REQUIRED
Power supply

Electrical

60.8919

LED Power Supply Source for remote installation. 48V/320W. 100/240 Vac



REQUIRED
Component

06.0303.00

Power feed cable



REQUIRED
Power supply

Electrical

60.9170

LED power supply source for remote installation, 48V/120W. 220/240 Vac



REQUIRED
Power supply

Electrical

60.9607

LED power supply source for remote installation, 110Vac-150W / 220Vac-200W



REQUIRED
Component

08.9071.14


The Fast Track Surface Profiles End Caps. 2 unit kit



REQUIRED
Component

08.9071.40

The Fast Track Surface Profiles End Caps. 2 unit kit



OPTIONAL
Component

06.0301.00

Connection cable. Electrical and data connection



OPTIONAL
Electrical

06.1987.14

Multifunction Smart Device for Running Magnet & Fast Track



OPTIONAL

Electrical

06.1987.40

Multifunction Smart Device for
Running Magnet & Fast Track



OPTIONAL

Component

08.9074.14

The Fast Track Recessed-Surface
Stopper