

# FLOS



■ F7542031 Matte Black

## To-Tie T2

Designed by Guglielmo Poletti, 2022


7W - 336lm - 2700K - CRI > 90



Designed by Guglielmo Poletti Table lamp providing diffused light. Clear glass cylindrical lamp body available in multiple sizes. The handle is made of aluminum and also acts as a light emitter. Multi-led diffuser in specially designed white polycarbonate to avoid the Multi Shadow effect and dazzle. High efficiency LED source with a lifetime of more than 50.000 hours. Electric cable of useful length 180 cm, covered in black fabric and equipped with dimmer switch for ON/OFF and adjustment of the light flow between 10-100%. Plug-in power supply with interchangeable plugs. To-Tie is a future-proof lamp as no glue is used to assemble its different parts. The product can therefore be separated, replaced individually, and recycled separately.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

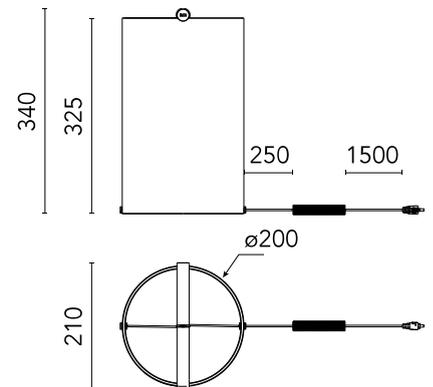

### Main specifications

|                        |                     |
|------------------------|---------------------|
| EAN                    | 8059607047620       |
| Mounting               | Table               |
| Environments           | Indoor dry location |
| Light source type      | LED                 |
| Light sources included | Yes                 |
| LED type               | LED Module          |
| Power (W)              | 7                   |
| Lumen Output (lm)      | 336                 |

### Physical

|                     |             |
|---------------------|-------------|
| Colour              | Matte Black |
| Length (mm)         | 210         |
| Cord colour         | Black       |
| Net weight (kg)     | 2.5         |
| Package height (mm) | 440         |
| Package width (mm)  | 295         |
| Package length (mm) | 295         |
| Package volume (m3) | 0.04        |
| IP internal         | 20          |
| H2O stop            | No          |

### Download

[Mounting instructions](#) PDF

### Photometric Files

[LDT / IES](#) ZIP


### Technical Drawings

[2D](#) ZIP

[3D](#) ZIP



## Schematic light drawing

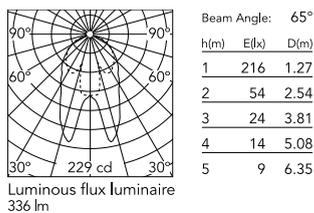

## Photometric


|                    |            |
|--------------------|------------|
| Lighting type      | Direct     |
| Light distribution | Asymmetric |
| CCT (K)            | 2700       |
| CRI>               | 90         |

## Electrical


|                    |                        |
|--------------------|------------------------|
| Insulation class   | III                    |
| Frequency (Hz)     | 50/60                  |
| Main voltage (Vac) | 24                     |
| LED current (mA)   | 500                    |
| Power supply       | Remote included        |
| Dimmable           | Yes                    |
| Power supply type  | Electronic 24V         |
| Dimming interface  | Dimmer Integrated      |
| Plug type          | Type A, Type C, Type G |

## Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F




Replaceable (LED only) light source by an end-user



Replaceable control gear by an end-user

## Spare Parts

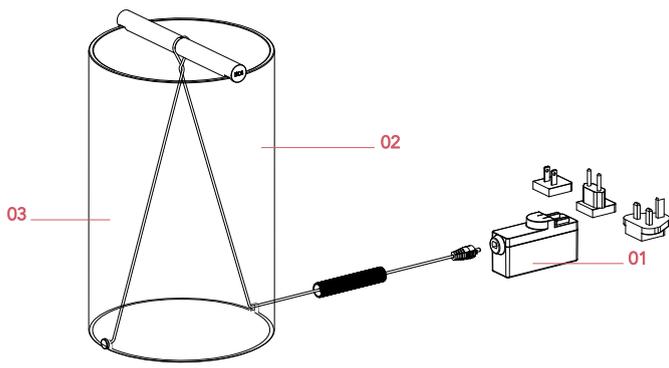

- |     |  |           |
|-----|--|-----------|
| 00. | Led Board with connectors for To-Tie Table 1-Table 2 | RF7541200 |
| 01. | Black plug assembly kit & 24V driver                 | RF6600230 |
| 02. | Assembly Body for To-Tie Table 2 Black               | RF7542131 |
| 03. | Base for To-Tie Table 2                              | RF7542100 |



RF7541200  
Led Board with connectors for  
To-Tie Table 1-Table 2



RF6600230  
Black plug assembly kit & 24V  
driver



RF7542131  
Assembly Body for To-Tie Table 2  
Black



RF7542100  
Base for To-Tie Table 2