

# FLOS


 F9520039 Green

## Wireline

Designed by Formafantasma, 2019

45W - 2793lm - 2700K - CRI> 90

Suspension lamp with diffused light. Tubular in transparent extruded glass and internal diffuser in opal PC. Ferrules made with CNC technology in satin stainless steel. Extruded cable in pink and forest green rubber. Injection molded PC rosette in the same finishes as the cable. The electronics integrated in the ceiling rose allows the use of different dimerization systems: push, 1-10, potentiometer, DALI. In the absence of these systems, the luminous flux can be set during installation, with the push system included in the canopy. Useful length of the cable 3mt.



Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	45
System power (W)	45
Lumen Output (lm)	2793

### Physical

Colour	Green
Length (mm)	1300
Cord colour	Green
Cord length (mm)	4050
Canopy colour	Green
Canopy length/diameter (mm)	130
Canopy height (mm)	70
Net weight (kg)	7.8
Package volume (m3)	0.05
IP internal	20

### Download

Mounting instructions [↓ PDF](#)

### Photometric Files

LDT / IES [↓ LDT](#)


### Technical Drawings

3D [↓ ZIP](#)

[Bim](#) [↓ ZIP](#)



## Schematic light drawing



## Photometric


Lighting type	Total
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
Extreme cut off	No

## Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	120-277
Power supply	Integrated
Dimmable	Yes
Power supply type	Dimmable 0-10V, Dimmable 1-10V, Dimmable DALI 1, Dimmable Push
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

## Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F

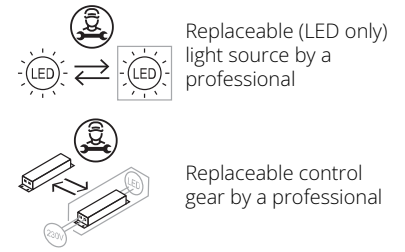

## Spare Parts

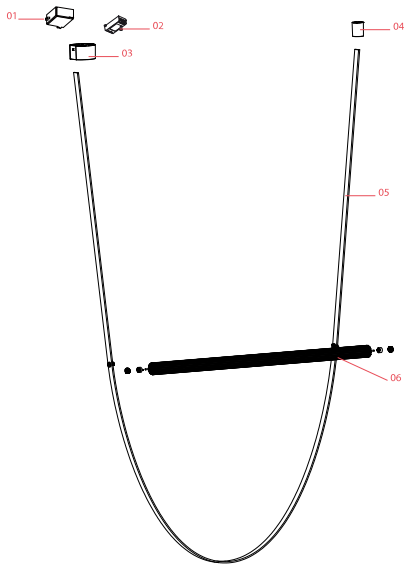

- |     |   |           |
|-----|---|-----------|
| 00. | Push button and cables assembly for dimmer            | RF27318   |
| 01. | Power supply unit for led                             | RF22934   |
| 02. | Led dimmer kit  | RF34197   |
| 03. | Wireline Assembly Rose Cover Green                    | RF9523139 |
| 04. | Wireline Assembly Suspension Rose for Wirelines Green | RF30045   |
| 05. | WireLine Green Wire                                   | F9522039  |
| 06. | WireLine Body   | F9521000  |



RF27318  
Push button and cables assembly  
for dimmer



RF22934  
Power supply unit for led



RF34197  
Led dimmer kit



RF9523139  
Wireline Assembly Rose Cover  
Green



RF30045  
Wireline Assembly Suspension  
Rose for Wirelines Green



F9522039  
WireLine Green Wire



F9521000  
WireLine Body