

FLOS

06.2502.CZ Bronze

Zero Track Surface Profile


Designed by FLOS Architectural, 2018



Electro-mechanical indoor profile for surface installation (ceiling or wall). To be fixed with specific screw plugs that come with the profile.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

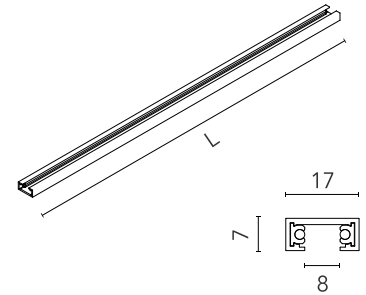

Main specifications

Mounting	Ceiling surface, Wall surface
Environments	Indoor dry location
Light sources included	no

Physical

Colour	Bronze
Trim	No
Length (mm)	3000
Net weight (kg)	0.62
IP internal	20

Download

[Mounting instructions](#)



Photometric

Extreme cut off	No
-----------------	----

Electrical

Insulation class	III
Power supply	Remote excluded
Dimmable	Yes
Power supply type	Non Dimmable, Dimmable Casambi

Notes

It is necessary to order the power connector, intermediate connectors and covers separately. Feed unit connectors available as 90° flat corner and curve (symmetric element for left/right corner), ceiling/wall - wall/wall inner corner, as well as "T" and "X" shape. For vertical installations, installing the stopper is mandatory. It must be ordered separately.

PWM voltage output dimmable drivers shall be used at frequencies between 250 and 500Hz.

Accessories & Power Supply



REQUIRED
Power supply

Electrical

60.9516

Remote Power Supply Non
Dimmable 24V. 120W. 220/240V



REQUIRED
Power supply

Electrical

06.2510.CZA

Power supply surface end. 96W -
220/240V



REQUIRED
Power supply

Electrical

06.2511.CZA

Power supply surface middle.
96W - 220/240V



REQUIRED
Power supply

Electrical

60.9443

Remote Power Supply Non
Dimmable 24V. 100W. 220/240V



REQUIRED
Power supply

Electrical

60.9515

Remote Power Supply Non
Dimmable 24V. 60W. 220/240V



REQUIRED
Power supply

Electrical

60.9374

Remote Power Supply Non
Dimmable 24V. 60W. 220/240V



REQUIRED
Power supply

Electrical

60.9777A


Remote Power Supply Non
Dimmable 24V. 120W. 220/240V



REQUIRED
Profile

06.2509.CZ

Zero Track Surface Profile. End
Cap



REQUIRED

06.2540.CZ

Zero Track Surface Profile. Feed Unit for Remote Power Supply Unit



REQUIRED

06.2541.CZ

Zero Track Surface Profile. Feed intermediate connector



OPTIONAL
Accessory

Electrical

60.9394

Controller 0/1-10V or Push Dim. Max 10A



OPTIONAL
Accessory

Electrical

60.9938

Controller Casambi. Max 12A



OPTIONAL
Accessory

08.0630.14

Stopper



OPTIONAL
Accessory

08.0630.40

Stopper



OPTIONAL

06.2506.14


Zero Track Surface Profile. Intermediate Connector



OPTIONAL

06.2506.40

Zero Track Surface Profile. Intermediate Connector



OPTIONAL
Corner

06.2542.CZ

Zero Track Surface Profile. 90°
Flat Corner



OPTIONAL
Corner

06.2543.CZ


Zero Track Surface Profile.
Ceiling/wall - wall/wall inner
corner



OPTIONAL
Corner

06.2544.CZ


Zero Track Surface Profile.
Interior ceiling/ceiling-wall/wall
curve



OPTIONAL
Corner

06.2545.CZ

Zero Track Surface Profile. T-
shaped connector



OPTIONAL
Corner

06.2546.CZ

Zero Track Surface Profile. Cross-
shaped connector