

# FLOS

60.9352


**LED power supply source for remote installation in 24V/200W electric control panel. To avoid problems of overload it is recommended to install a power source every 185W. 100/240V.**



Remote Power supply LED. 200W – 24V. 100-240V, 50-60Hz. Recommended max 185W

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

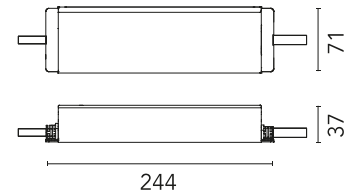

## Main specifications


Environments	Indoor dry location
Power (W)	200

## Physical

Trim	No
Net weight (kg)	1.22
IP internal	20



## Ecodesign and Energy Labelling



Replaceable control gear by a professional

## Electrical

Frequency (Hz)	50
Main voltage (Vac)	110-240
Alternating current voltage (Vac)	100-240
Dimmable	No