

# FLOS

60.9949

**Continuous current power supply of 7,2-24W, 220/240V - 50/60Hz with power current selected through adjustable switch. 200mA - 8W / 250mA - 10W / 300mA - 12W / 350mA - 14W. Trailing & leading edge, mains dimming.**



Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

## Main specifications


Power (W) 14

## Physical


Trim No

Length (mm) 130

IP internal 20

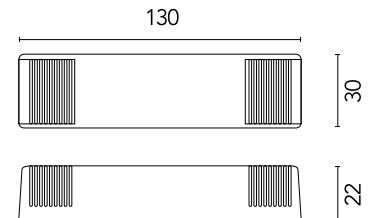

## Ecodesign and Energy Labelling



Replaceable control gear by a professional

## Photometric

Extreme cut off No

## Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
LED current (mA)	200 / 250 / 300 / 350
Power supply	Remote
Dimmable	Yes
Power supply type	Mains Cut Dimming
Dimming interface	Remote Dimmable (Dimmer Not Included)
Emergency	Yes
Batteries inside	No