

FLOS

FA1052540018 Deep Brown


Aimer 4 Constant Voltage

NEW

Designed by FLOS Outdoor, 2011



LED source included. Remote electrical power supply 24V dc ON/OFF to be ordered separately. Parallel connection. Equipped with a 2000 mm protruding section of neoprene cable and a kit with crimpable connectors and adhesive heat-shrinkable sleeves that guarantee the tightness of the connection. Fixing bracket included. Extraclear transparent glass. The metal nail for ground installation needs to be ordered separately.

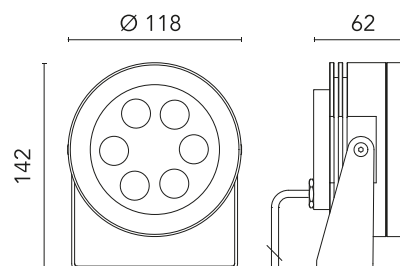

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

EAN	8054793609928
Mounting	Ground
Environments	Outdoor wet location
Light source type	LED
Light sources included	Yes
LED type	Power LED
Number of lamps	1
Power (W)	10
System power (W)	10
Source flux (lm)	889
Lumen Output (lm)	558

Physical

Colour	Deep Brown
Orientation	Directional
Longitudinal tilting (°)	185
Net weight (kg)	1.26
Package height (mm)	175
Package width (mm)	135
Package length (mm)	135
IP internal	67
IP external	66

Download

Mounting instructions [ZIP](#)

Photometric Files

LDT / IES [ZIP](#)

Technical Drawings

2D [ZIP](#)

3D [ZIP](#)

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F



<https://professional.flos.com/en/global/product/aimer-4-constant-voltage-fa1052540018/>


FA1052540018

©2022 Flos - P.IVA 00290820174 - 12/6/2025

professional.flos.com | flos.outdoor@flos.com 1/3

In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order to improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.

Schematic light drawing



Photometric

Light distribution	Symmetric
CCT (K)	4000
CRI>	80
Beam angle C0-180 (°)	30
Beam angle C90-270 (°)	30
Extreme cut off	No

Electrical

Insulation class	III
Frequency (Hz)	50/60
Main voltage (Vac)	24
Power supply	Remote excluded
Dimmable	No
Power supply type	Non Dimmable
Dimming interface	Not Dimmable
Emergency	No

Notes

Dimmable version on request

Accessories & Power Supply



OPTIONAL
Power supply

RF25752
Power supply 24Vdc 20W / 220-240V IP67 Class II selv. Non Dimmable



OPTIONAL
Accessory

F990C010000
3/4 way terminal block 4 poles IP68 H2O stop. (ø5,5÷12mm cable)



OPTIONAL
Power supply

F990B27A000
Power supply 24Vdc 70W / 220-240V IP67 Class I selv. Non Dimmable



OPTIONAL
Accessory

F990C00A000
2 way terminal block 4 poles IP68 H2O stop. (ø5,5÷12mm cable)



OPTIONAL
Accessory

FA136
Ground Spike Aimer 1/Aimer 2/Aimer 3/Perseo 2



OPTIONAL
Power supply

F990B28A000
Power supply 24Vdc 50W / 220-240V IP67 Class I selv. Non Dimmable