

# FLOS

FA1052541212 Forest Green

## Aimer 4 Constant Voltage NEW


Designed by FLOS Outdoor, 2011



LED source included. Remote electrical power supply 24V dc ON/OFF to be ordered separately. Parallel connection. Equipped with a 2000 mm protruding section of neoprene cable and a kit with crimpable connectors and adhesive heat-shrinkable sleeves that guarantee the tightness of the connection. Fixing bracket included. Extraclear transparent glass. The metal nail for ground installation needs to be ordered separately.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

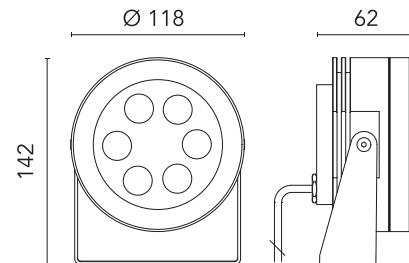

### Main specifications

EAN	8054793609980
Mounting	Ground
Environments	Outdoor wet location
Light source type	LED
Light sources included	Yes
LED type	Power LED
Number of lamps	1
Power (W)	10
System power (W)	10
Source flux (lm)	889
Lumen Output (lm)	570

### Physical

Colour	Forest Green
Orientation	Directional
Longitudinal tilting (°)	185
Net weight (kg)	1.26
Package height (mm)	175
Package width (mm)	135
Package length (mm)	135
IP internal	67
IP external	66

### Download

Mounting instructions [ZIP](#)



### Photometric Files

LDT / IES



### Technical Drawings

2D




3D



### Ecodesign and Energy Labelling


This product contains a light source of energy efficiency class F



Replaceable (LED only) light source by a professional



## Schematic light drawing



Beam Angle: 8°		
h(m)	E(k)	D(m)
1	14525	0.14
2	3631	0.27
3	1614	0.41
4	908	0.54
5	581	0.68

Luminous flux luminaire  
570 lm

## Photometric

Light distribution	Symmetric
CCT (K)	4000
CRI>	80
Beam angle C0-180 (°)	8
Beam angle C90-270 (°)	8
Extreme cut off	No

## Electrical

Insulation class	III
Frequency (Hz)	50/60
Main voltage (Vac)	24
Power supply	Remote excluded
Dimmable	No
Power supply type	Non Dimmable
Dimming interface	Not Dimmable
Emergency	No

## Notes

Dimmable version on request

## Accessories & Power Supply



### OPTIONAL Power supply

RF25752

Power supply 24Vdc 20W / 220-240V IP67 Class II selv. Non Dimmable

### OPTIONAL Accessory

F990C010000

3/4 way terminal block 4 poles IP68 H2O stop. (ø5,5÷12mm cable)

### OPTIONAL Power supply

F990B27A000

Power supply 24Vdc 70W / 220-240V IP67 Class I selv. Non Dimmable

### OPTIONAL Accessory

F990C00A000

2 way terminal block 4 poles IP68 H2O stop. (ø5,5÷12mm cable)



### OPTIONAL Accessory

FA136

Ground Spike Aimer 1/Aimer 2/Aimer 3/Perseo 2

### OPTIONAL Power supply

F990B28A000

Power supply 24Vdc 50W / 220-240V IP67 Class I selv. Non Dimmable