

## Aimer 5 Rgb NEW


Designed by FLOS Outdoor, 2011



RGB LED source included. Remote electrical power supply with DMX 3chx350mA interface to be ordered separately. Serial connection. Equipped with a 2000 mm protruding section of neoprene cable and a kit with crimpable connectors and adhesive heat-shrinkable sleeves that guarantee the tightness of the connection. Transparent screen-printed glass. The metal nail for ground installation needs to be ordered separately.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

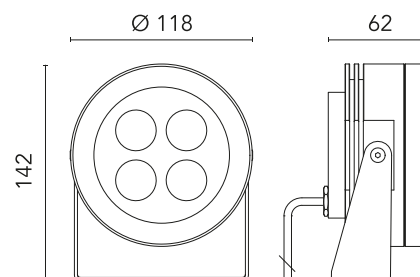

### Main specifications

|                        |                      |
|------------------------|----------------------|
| EAN                    | 8054793611327        |
| Mounting               | Ground               |
| Environments           | Outdoor wet location |
| Light source type      | LED                  |
| Light sources included | Yes                  |
| LED type               | Power LED            |
| Number of lamps        | 1                    |
| Power (W)              | 14                   |
| System power (W)       | 13.6                 |

### Physical

|                          |             |
|--------------------------|-------------|
| Colour                   | Anthracite  |
| Orientation              | Directional |
| Longitudinal tilting (°) | 185         |
| Net weight (kg)          | 1.24        |
| Package height (mm)      | 175         |
| Package width (mm)       | 135         |
| Package length (mm)      | 135         |
| IP internal              | 67          |
| IP external              | 66          |

### Download

Mounting instructions

[ZIP](#)

### Ecodesign and Energy Labelling



Replaceable (LED only)  
light source by a  
professional

Photometric

|                    |           |
|--------------------|-----------|
| Light distribution | Symmetric |
| CCT (K)            | RGB       |
| Extreme cut off    | No        |

Electrical

|                   |                                          |
|-------------------|------------------------------------------|
| Insulation class  | III                                      |
| Frequency (Hz)    | 50/60                                    |
| Power supply      | Remote excluded                          |
| Dimmable          | Yes                                      |
| Power supply type | Dimmable DMX                             |
| Dimming interface | Remote Dimmable<br>(Dimmer Not Included) |
| Emergency         | No                                       |

Notes

Please check with your referent person in our Front Office if a code modification is needed to meet the required certification compliance

Accessories & Power Supply



OPTIONAL  
Accessory

F990B10A000

DMX controller; dimmer switch  
for recessed box (60mm hole  
centres)



OPTIONAL  
Accessory

F990B11A000

DMX controller; stand-alone/pc  
interface.



OPTIONAL  
Accessory

F990B13A000

DMX splitter 512



OPTIONAL  
Accessory

F990B12A000

DMX cable - shielded twisted pair  
with 110 Ohm constant  
impedance



OPTIONAL  
Accessory

FA136

Ground Spike Aimer 1/Aimer  
2/Aimer 3/Perseo 2



OPTIONAL  
Power supply

F990B22A000

Power supply with DMX interface  
for RGB fixtures 36W/220÷240v-  
3CH x 350mA (3CH x 10 x 1W)  
DMX control allowed IP67 Class I  
Selv Eq.