


FLOS

 F0418030 Black

Arrangements Recessed Rose

Designed by Michael Anastassiades, 2018



Recessed Rose-MAX190W

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

EAN	8059607014202
Environments	Indoor dry location
Power (W)	210

Physical

Colour	Black
Recessed depth (mm)	250
Cord colour	Black
Cord length (mm)	2400
Canopy colour	Black
Canopy length/diameter (mm)	190
Canopy height (mm)	8
Net weight (kg)	3.3
Package height (mm)	220
Package width (mm)	300
Package length (mm)	470
Package volume (m3)	0.03
IP internal	20

Download

Mounting instructions  PDF

Spare Parts  PDF




Photometric

Electrical

Extreme cut off	No	Insulation class	I
		Frequency (Hz)	50/60
		Main voltage (Vac)	100-240
		Power supply	Integrated
		Dimmable	Yes
		Power supply type	Dimmable 0-10V, Dimmable Push, Dimmable 1-10V, Dimmable DALI 1
		Dimming interface	Remote Dimmable (Dimmer Not Included)
		Batteries inside	No

Spare Parts

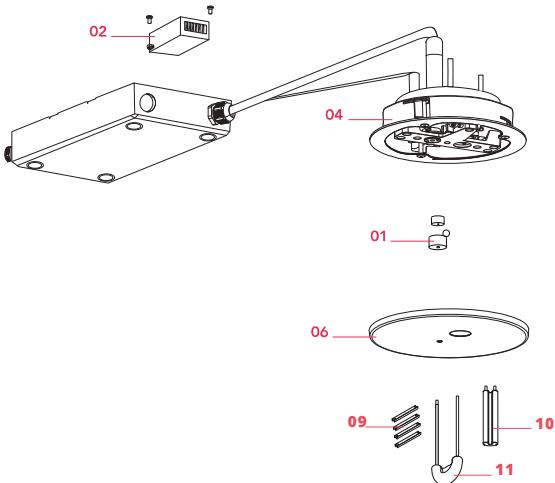

00.	Push button and cables assembly for dimmer	RF27318
02.	Led dimmer kit	RF34197
03.	Arrangements Recessed power unit	RF27614
04.	Arrangements Recessed ceiling wall assemly	RF27613
06.	Arrangements Recessed ceiling rose cover	RF26773
09.	Spacers cable	RF26602
10.	Regolation cables key	RF26440
11.	Element support assembly	RF26906

DOWNLOAD



RF27318

Push button and cables assembly
for dimmer



RF34197

Led dimmer kit



RF27614

Arrangements Recessed power
unit



RF27613

Arrangements Recessed ceiling
wall assemilby



RF26773

Arrangements Recessed ceiling
rose cover



RF26602

Spacers cable



RF26440

Regolation cables key



RF26906

Element support assembly