

## Find Me 1 (Trim/No Trim)

Designed by Jorge Herrera, 2016



Recessed adjustable luminaire for indoor application. Remote power supply 500 mA not included.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

### Main specifications

|                        |                     |
|------------------------|---------------------|
| Mounting               | Ceiling recessed    |
| Environments           | Indoor dry location |
| Light source type      | LED                 |
| Light sources included | Yes                 |
| LED type               | Power LED           |
| Lamp category          | LED                 |
| Number of lamps        | 1                   |
| Power (W)              | 6                   |
| Lumen Output (lm)      | 344                 |

### Physical

|                          |            |
|--------------------------|------------|
| Colour                   | White      |
| Orientation              | Adjustable |
| Rotation (°)             | 360        |
| Longitudinal tilting (°) | 90         |
| Recessed depth (mm)      | 147        |
| Spot diameter (mm)       | 35         |
| Net weight (kg)          | 0.23       |
| IP internal              | 20         |

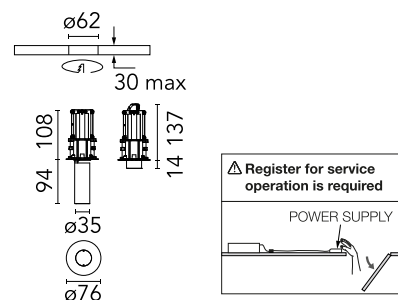

### Download

Mounting instructions [Download PDF](#)

### Photometric Files

LDT / IES [Download ZIP](#)

### Technical Drawings

2D [Download ZIP](#)

3D [Download ZIP](#)


Bim [Download ZIP](#)



### Ecodesign and Energy Labelling

Replaceable (LED only) light source by a professional

Schematic light drawing



Photometric

|                        |           |
|------------------------|-----------|
| Lighting type          | Direct    |
| Light distribution     | Symmetric |
| CCT (K)                | 2700      |
| CRI>                   | 90        |
| Beam angle C0-180 (°)  | 14        |
| Beam angle C90-270 (°) | 14        |
| UGR <sub>L</sub>       | <10       |

Electrical

|                     |                                                                                                |
|---------------------|------------------------------------------------------------------------------------------------|
| Insulation class    | III                                                                                            |
| Frequency (Hz)      | 0                                                                                              |
| Forward voltage (V) | 12                                                                                             |
| LED current (mA)    | 500                                                                                            |
| Power supply        | Remote excluded                                                                                |
| Dimmable            | Yes                                                                                            |
| Power supply type   | Non Dimmable,<br>Dimmable DALI 2,<br>Dimmable 0-10V,<br>Dimmable Casambi,<br>Mains Cut Dimming |

Notes

Accessories included (honeycomb and screening crosspiece). Remote power supply to be installed in an accessible place.

Accessories & Power Supply



REQUIRED  
Power supply  
Electrical

60.8880  
Continuous current power supply of 6W, 100V / 14W, 240V - 50/60Hz with 500 mA supply voltage



REQUIRED  
Power supply  
Electrical

60.9188  
Continuous current power supply of 13-20W, 110\*/240V - 50/60Hz with current selected through adjustable 200 mA - 13W / 300 mA - 15W / 350 mA - 18W / 400 / 450 / 500 / 550 / 600 / 650 / 700 / 750 / 800 / 850 / 900 mA - 20W. switch. 0/1-10V or push.



REQUIRED  
Power supply  
Electrical

60.9160  
Non dimmable continuous current power supply of 220/240V - 50/60Hz with power current selected through adjustable with switch 200 mA - 8,5W / 250mA - 11W / 300 mA - 13W / 350 mA - 15W / 400 mA - 17,5W / 450 mA - 19,5W / 500 mA - 22W



REQUIRED  
Power supply  
Electrical

60.9222  
Continuous current power supply of 12-20W, 110/240V - 50/60Hz with power current selected through adjustable 250mA - 12W / 350mA - 17W / 400mA - 19W / 450 / 500/ 550 / 600 / 700mA - 20W regulable Dali 1 & Dali 2



REQUIRED  
Power supply  
Electrical

60.9207



REQUIRED  
Power supply  
Electrical

60.9467

|                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                 |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Casambi continuous current power supply, dimmable<br>220/240V - 50/60Hz, 300mA -<br>16W / 350mA - 18,5W / 400mA -<br>21,5W / 450 mA - 24W / 500mA -<br>27W / 600mA - 32W / 650 mA -<br>35W / 700 mA - 36W /750 /800<br>/900 /1000 /1050 /1200 mA -<br>38W. | 20W Constant current power supply, AC phase-cut adjustable, trailing & leading edge dimming (mains dimming), 220/240V - 50/60Hz, with dip-switch programmable power supply current. Output current: 900mA - 20W / 850mA - 20W / 800mA - 20W / 750mA - 20W / ... |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|