

FLOS

■ F015L20A030 Black

Mile Path 1 NEW

Designed by Antonio Citterio, 2020



100lm - 2700K - CRI> 80

LED light source included. Integrated 220–240 V ON/OFF electrical power. Equipped with double cable gland for inlet and outlet connection. Fixing bracket included.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

Main specifications

EAN	8054793236834
Mounting	Wall
Environments	Outdoor wet location
Light source type	LED
Light sources included	Yes
LED type	Power LED
Number of lamps	1
System power (W)	4.9
Lumen Output (lm)	100

Physical

Colour	Black
Orientation	Fixed
Net weight (kg)	0.6
Package height (mm)	98
Package width (mm)	156
Package length (mm)	156
IP internal	66

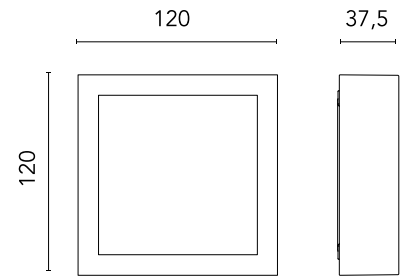

Download

Mounting instructions [↓ ZIP](#)

Photometric Files

LDT / IES [↓ ZIP](#)

Technical Drawings


2D [↓ ZIP](#)

3D [↓ ZIP](#)

[🔒 Bim](#) [↓ ZIP](#)



Schematic light drawing



Beam Angle: 55°

h(m)	E(lx)	D(m)
1	36	5.18
2	9	10.36
3	4	15.54
4	2	20.71
5	1	25.89

Luminous flux luminaire
100 lm

Photometric

Light distribution	Asymmetric
CCT (K)	2700
CRI>	80
Extreme cut off	No

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
Power supply	Integrated
Dimmable	No
Power supply type	Non Dimmable
Dimming interface	Not Dimmable
Emergency	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E

