

# FLOS

F015L40A006 Grey

## Mile Path 1 NEW

Designed by Antonio Citterio, 2020



108lm - 4000K - CRI> 80

LED light source included. Integrated 220–240 V ON/OFF electrical power. Equipped with double cable gland for inlet and outlet connection. Fixing bracket included.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

### Main specifications

|                        |                      |
|------------------------|----------------------|
| EAN                    | 8054793237237        |
| Mounting               | Wall                 |
| Environments           | Outdoor wet location |
| Light source type      | LED                  |
| Light sources included | Yes                  |
| LED type               | Power LED            |
| Number of lamps        | 1                    |
| System power (W)       | 4.9                  |
| Lumen Output (lm)      | 108                  |

### Physical

|                     |       |
|---------------------|-------|
| Colour              | Grey  |
| Orientation         | Fixed |
| Net weight (kg)     | 0.6   |
| Package height (mm) | 98    |
| Package width (mm)  | 156   |
| Package length (mm) | 156   |
| IP internal         | 66    |

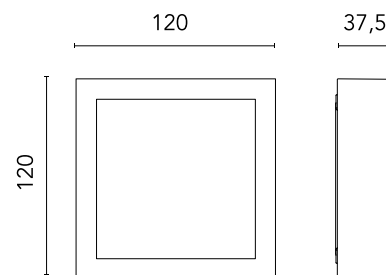

### Download

[Mounting instructions](#) ZIP

### Photometric Files

[LDT / IES](#) ZIP

### Technical Drawings


[2D](#) ZIP

[3D](#) ZIP

[Bim](#) ZIP



Schematic light drawing



Photometric


|                    |            |
|--------------------|------------|
| Light distribution | Asymmetric |
| CCT (K)            | 4000       |
| CRI>               | 80         |
| Extreme cut off    | No         |

Electrical


|                    |              |
|--------------------|--------------|
| Insulation class   | I            |
| Frequency (Hz)     | 50/60        |
| Main voltage (Vac) | 220-240      |
| Power supply       | Integrated   |
| Dimmable           | No           |
| Power supply type  | Non Dimmable |
| Dimming interface  | Not Dimmable |
| Emergency          | No           |

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D



Replaceable (LED only) light source by a professional



Replaceable control gear by a professional