

# FLOS



F021MRMJ012 Forest Green

## Outgraze 50 RGB L 1200 mm Forest Green

Designed by FLOS Outdoor, 2019



Integrated 120/240V power supply and DMX-RDM interface. Installation brackets, to be ordered separately. Sandblasted glass.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

### Main specifications

|                        |                      |
|------------------------|----------------------|
| EAN                    | 8054793365169        |
| Mounting               | Wall                 |
| Environments           | Outdoor wet location |
| Light source type      | LED                  |
| Light sources included | Yes                  |
| LED type               | Power LED            |
| Number of lamps        | 1                    |
| Power (W)              | 48                   |

### Physical

|                         |              |
|-------------------------|--------------|
| Colour                  | Forest Green |
| Trim                    | No           |
| Orientation             | Adjustable   |
| Transversal tilting (°) | 180          |
| Length (mm)             | 1200         |
| Net weight (kg)         | 3.28         |
| Package height (mm)     | 1270         |
| Package width (mm)      | 130          |
| Package length (mm)     | 120          |
| Package volume (m3)     | 0.02         |
| IP internal             | 66           |

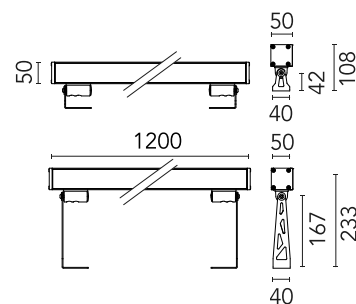

### Download


Mounting instructions

[ZIP](#)

### Ecodesign and Energy Labelling



Replaceable (LED only) light source by a professional



Replaceable control gear by a professional



Photometric

|                        |           |
|------------------------|-----------|
| Light distribution     | Symmetric |
| Beam angle C0-180 (°)  | 50        |
| Beam angle C90-270 (°) | 50        |

Electrical

|                    |                   |
|--------------------|-------------------|
| Insulation class   | I                 |
| Frequency (Hz)     | 50/60             |
| Main voltage (Vac) | 120-240           |
| Power supply       | Integrated        |
| Dimmable           | Yes               |
| Dimming interface  | Dimmer Integrated |
| Emergency          | No                |

Notes

We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire.

During the installation and the maintenance of the fixtures it is important to be careful and avoid damages on the paint coating.

Damages on the coating exposed to outdoor conditions or water, could cause corrosion.

Chemical substances affect the anticorrosion covering protection.

For LED fixtures, there is evidence that most of the damages are connected to electrical effects related to the insulations, which cause destructive electrical discharges

These effects are frequently caused by:

- over voltage coming from the mains’ network where fixture is connected.
- electrostatic discharge (ESD) coming from the environment.

The use of a protective device against the overvoltage on the electrical installation is warmly suggest this helps to reduce the intensity of some of these phenomenon and prevent irreversible damages. The selection of the type of device to be used must be adjust on the electrical plant.

Accessories & Power Supply



REQUIRED  
Accessory

F990C010000  
3/4 way terminal block 4 poles  
IP68 H2O stop. (ø5,5÷12mm  
cable)



REQUIRED  
Accessory

F021Z040000  
Plug&play connector 5 poles



REQUIRED  
Accessory

F021Z060000  
5-pole plug&play connector + 5-  
pole cable, 5000 mm length.



REQUIRED  
Accessory

F990C030000  
4 way junction box 5 poles IP68  
(6-14 mm cables)



REQUIRED  
Accessory

F990B10A000  
DMX controller; dimmer switch  
for recessed box (60mm hole  
centres)



REQUIRED  
Accessory

F990B11A000  
DMX controller; stand-alone/pc  
interface.



REQUIRED  
Accessory

F990B13A000  
DMX splitter 512



REQUIRED  
Accessory

F990B12A000  
DMX cable - shielded twisted pair  
with 110 Ohm constant  
impedance



REQUIRED  
Accessory

F990C080000

Connector kit 5-pole flying socket  
+ EU plug IP68.



REQUIRED  
Accessory

F1203012

One pair of short brackets L 80  
mm. Forest Green



REQUIRED  
Accessory

F1204012

One pair of long brackets L 200  
mm. Forest Green



REQUIRED  
Power supply

RF25747

Power supply 24V 10W /110-  
240V IP20 Class II selv. Non  
Dimmable