



Power supply surface end. Non Dimmable. Cannot be installed on wall tracks.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling surface
Environments	Indoor dry location
Power (W)	96
System power (W)	106.5

Physical


Colour	Deep Brown
Length (mm)	355
Net weight (kg)	0.7
IP internal	20

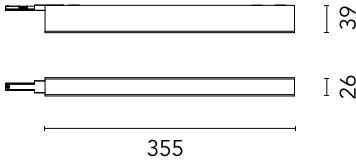

Download

Mounting instructions  PDF

Ecodesign and Energy Labelling



Replaceable control gear by a professional

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
Driver input voltage (V)	198-264
Driver output voltage (V)	24
Forward voltage (V)	24
Power supply	Integrated
Dimmable	No
Emergency	No