

FLOS

■ ATP0002A0EAB1 Black

The Tracking Power Evo Profile 2000mm

Length: 2000 - Ceiling recessed



Three-phase track with minimum impact on the architecture for embedded installations in plasterboard ceilings.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light sources included	no

Physical


Colour	Black
Trim	No
Recessed depth (mm)	30
Length (mm)	2000
Net weight (kg)	3.33
IP internal	20

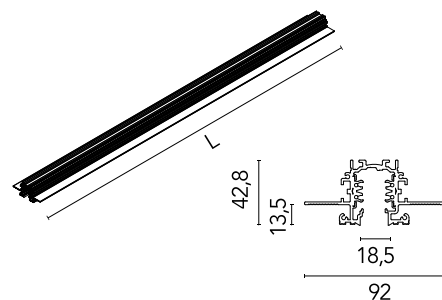

Download

Mounting instructions

↓ PDF



Electrical

Insulation class	I
Main voltage (Vac)	220-240
Dimmable	Yes
Dimming interface	Remote Dimmable (Dimmer Not Included)

Accessories & Power Supply



REQUIRED
Connector

ATP0102A0EAB1

Feed Connector Left



REQUIRED
Connector

ATP0101A0EAB1

Feed Connector Right



REQUIRED
Accessory

ATP0205A0EAB1

End Cap Black



OPTIONAL
Corner

ATP0106A0EAB1

90° L-Corner Outer



OPTIONAL
Corner

ATP0105A0EAB1

90° L-Corner Inner



OPTIONAL
Connector

ATP0104A0EAB1

Intermediate Insulating Connector



OPTIONAL
Connector

ATP0103A0EAB1

Intermediate Jointing Connector



OPTIONAL
Accessory

ATP0201A0EAAZ

Cutting Tool for Conductors



OPTIONAL Accessory

ATP0202A0EAB1

Adjustable ceiling kit (optional). 2
unit kit