




# Three Phase Track Surface/Pendant 4000 mm

Designed by FLOS Architectural, 2013

Length: 4000 - Suspension, Ceiling surface

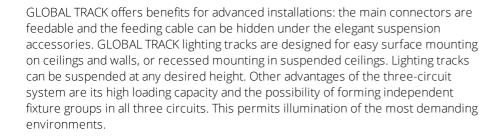





Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

### Main specifications

	Mounting	Suspension, Ceiling surface
--	----------	-----------------------------

Environments

Indoor dry location

# Physical

Colour	Matte White
Trim	No
Length (mm)	4000
Net weight (kg)	3.20
IP internal	20
IP external	20

### Download

Mounting instructions















https://professional.flos.com/en/global/product/three-phase-track-surface-pendant-4000-mm-60.3104.11/

60.3104.11

# Electrical

Insulation class I
Emergency No

https://professional.flos.com/en/global/product/three-phase-track-surface-pendant-4000-mm-60.3104.11/

60.3104.11

### **Accessories & Power Supply**



### OPTIONAL Accessory

60 3008 11

Attachment on track for steel cable suspension with M6 thread end



### OPTIONAL Accessory

60.3008.14

Attachment on track for steel cable suspension with M6 thread end



#### 60 3014 11

Installation

Suspension rod with 1m rose. M6 thread



### Installation

60.3014.14

1 m suspension rod with ceiling rose kit. M6 thread



### OPTIONAL Accessory

Installation

60.3016.11

Blind end



### OPTIONAL Accessory

60.3016.12

Blind end



## OPTIONAL Accessory

0.3016.14

Blind end



### OPTIONAL Accessory

60.3018.1

Attachment on track for rod suspension M6 thread









Electrical

60 3018 14

Attachment on track for rod suspension M6 thread

OPTIONAL Accessory

Installation

60.3022.11

Recessed box for fix-point

OPTIONAL Accessory

Installation

60.3022.14

Recessed box for fix-point

OPTIONAL Accessory

Installation

50 3023 11

Fix-point









OPTIONAL Accessory

Installation

60.3023.14

Fix-point

OPTIONAL Accessory

Installation

60.3025.11

Bracket

OPTIONAL Accessory

Installation

60.3025.14

Bracket

OPTIONAL Accessory

Installation

60.3025.29

Bracket









Electrical

Connector 90° Outside

OPTIONAL Accessory

Electrical

60.3028.14

Connector 90° Outside

OPTIONAL Accessory

60.3028.29

Connector 90° Outside

OPTIONAL Accessory

Electrical

60 3029 11

Connector 90° Inside









OPTIONAL Accessory

Electrical

60.3029.14

Connector 90° Inside

OPTIONAL Accessory

Electrical

50.3029.29

Connector 90° Inside

OPTIONAL Accessory

Electrical

60 3036 11

Cross Coupling

OPTIONAL Accessory

Electrical

60.3036.14

Cross Coupling









Electrical

60.3036.29

Cross Coupling

OPTIONAL Accessory

Electrical

60 3043 11

Mean connector

OPTIONAL Accessory

Electrical

60.3043.14

Mean connector

OPTIONAL Accessory

Electrical

60 3043 29

Mean connector









OPTIONAL Accessory

Electrical

60.3044.11

Straight connector

OPTIONAL Accessory

Electrical

50 3044 12

Straight connector

OPTIONAL Accessory

Electrical

60.3044.14

Straight connector

OPTIONAL Accessory

Electrical

50 3046 11

Corner adjustable connector









Electrical

60.3046.14

Corner adjustable connector

OPTIONAL Accessory

Electrical

60.3046.29

Corner adjustable connector

OPTIONAL Accessory

Installation

60 3047 11

Connector T - Inside Right

OPTIONAL Accessory

60.3047.14

Installation

Connector T - Inside Right









OPTIONAL Accessory

Installation

60.3047.29

Connector T - Inside Right

OPTIONAL Accessory

Installation

60 3048 11

Connector T - Inside Left

OPTIONAL Accessory

Installation

60.3048.14

Connector T - Inside Left

OPTIONAL Accessory

Installation

60.3048.29

Connector T - Inside Left









Installation

60 3049 1

Connector T - Outside Right

OPTIONAL Accessory

Installation

60.3049.14

Connector T - Outside Right

OPTIONAL Accessory

Installation

60 3051 11

Connector T - Outside Left

OPTIONAL Accessory

Installation

60.3051.14

Connector T - Outside Left









OPTIONAL Accessory

Installation

60.3051.29

Connector T - Outside Left

OPTIONAL Accessory

Mounting

60 3054

Lead bending key

OPTIONAL Accessory

Installation

60 3057 11

Attachment on track for wire suspension

OPTIONAL Accessory

Installation

60.3057.29

Attachment on track for wire suspension









Installation

60 3092 1

Power supply rose cover

OPTIONAL Accessory

Installation

60.3094.11

Ceiling fitting with rose

OPTIONAL Accessory

Installation

60.3094.14

Ceiling fitting with rose

OPTIONAL Accessory

Installation

60 3095 29

Lead-weighted wire 1500 mm



OPTIONAL Accessory

Installation

60.3096.29

Lead-weighted wire 3000 mm

OPTIONAL Accessory

Installation

60 3097 1

1 m suspension rod with ceiling rose with m6 thread

OPTIONAL Accessory

Installation

60.3097.14

1 m suspension rod extension set with m6 thread

OPTIONAL Accessory

Installation

60.3090.11A

Track cover strip L 2000 mm









OPTIONAL Accessory Installation

60 3000 144

Track cover strip L 2000 mm

OPTIONAL Accessory

Electrical

50.3037.29

Flexible connector

OPTIONAL Accessory

Electrical

60.3038.14

Live end right

OPTIONAL Accessory

Electrical

50 3038 12

Live end right









OPTIONAL Accessory

Electrical

60.3038.11

Live end right

OPTIONAL Accessory

Electrical

60.3039.14

Live end left

OPTIONAL Accessory

Electrical

60 3039 12

Live end left

OPTIONAL Accessory

Electrical

50 3039 1

Live end left









Installation

60 3023 29

Fix-point

OPTIONAL Accessory

Electrical

60 3037 11

Flexible connector

OPTIONAL Accessory

Electrical

60.3037.14

Flexible connector

OPTIONAL Accessory

Installation

60 3083 29

Complete wall support 70 mm



# OPTIONAL Accessory

60.3093.29

Bracket for fixing track to wall or ceiling