


FLOS


60.3102.29ADA Aluminum

Three Phase Track Surface/Pendant Dali 2000 mm

Length: 2000 - Suspension, Ceiling surface

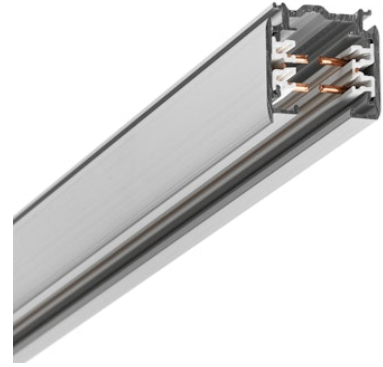

GLOBAL PRO offers benefits for advanced installations: the main connectors are feedable and the feeding cable can be hidden under the elegant suspension accessories. GLOBAL PRO lighting tracks are designed for easy surface mounting on ceilings and walls, or recessed mounting in suspended ceilings. Lighting tracks can be suspended at any desired height. Other advantages of the three-circuit system are its high loading capacity and the possibility of forming independent fixture groups in all three circuits. This permits illumination of the most demanding environments.



Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Suspension, Ceiling surface
Environments	Indoor dry location

Physical

Colour	Aluminum
Trim	No
Length (mm)	2000
Net weight (kg)	0.80
IP internal	20
IP external	20

Download

[Mounting instructions](#)

[↓ PDF](#)



Electrical

Insulation class I

Emergency No

Accessories & Power Supply



OPTIONAL
Accessory

60.3008.11

Attachment on track for steel cable suspension with M6 thread end



OPTIONAL
Accessory

60.3008.14

Attachment on track for steel cable suspension with M6 thread end



OPTIONAL
Accessory

Installation

60.3014.14

1 m suspension rod with ceiling rose kit, M6 thread



OPTIONAL
Accessory

Installation

60.3016.11

Blind end



OPTIONAL
Accessory

60.3016.12

Blind end



OPTIONAL
Accessory

60.3016.14

Blind end



OPTIONAL
Accessory

60.3018.11

Attachment on track for rod suspension M6 thread



OPTIONAL
Accessory

Electrical

60.3018.14

Attachment on track for rod suspension M6 thread



OPTIONAL
Accessory

Installation

60.3025.11

Bracket



OPTIONAL
Accessory

Installation

60.3025.14

Bracket



OPTIONAL
Accessory

Installation

60.3025.29

Bracket



OPTIONAL
Accessory

Electrical

60.3028.11ADA

Connector 90° Outside Dali



OPTIONAL
Accessory

60.3028.14ADA

Connector 90° Outside Dali



OPTIONAL
Accessory

Electrical

60.3028.29ADA

Connector 90° Outside Dali



OPTIONAL
Accessory

Electrical

60.3029.11ADA

Connector 90° Inside Dali



OPTIONAL
Accessory

Electrical

60.3029.14ADA

Connector 90° Inside Dali



OPTIONAL
Accessory

Electrical

60.3029.29ADA

Connector 90° Inside Dali



OPTIONAL
Accessory

Electrical

60.3036.11ADA

Cross Coupling Dali



OPTIONAL
Accessory

Electrical

60.3036.14ADA

Cross Coupling Dali



OPTIONAL
Accessory

Electrical

60.3036.29ADA

Cross Coupling Dali



OPTIONAL
Accessory

Electrical

60.3043.11ADA

Mean connector Dali



OPTIONAL
Accessory

Electrical

60.3043.14ADA

Mean connector Dali



OPTIONAL
Accessory

Electrical

60.3043.29ADA

Mean connector Dali



OPTIONAL
Accessory

60.3044.11ADA

Straight Connector Dali



OPTIONAL
Accessory

Electrical

60.3044.12ADA

Straight Connector Dali



OPTIONAL
Accessory

Electrical

60.3044.14ADA

Straight Connector Dali



OPTIONAL
Accessory

Installation

60.3047.11ADA

Connector T - Inside Right Dali



OPTIONAL
Accessory

Installation

60.3047.14ADA

Connector T - Inside Right Dali



OPTIONAL
Accessory

Installation

60.3047.29ADA

Connector T - Inside Right Dali



OPTIONAL
Accessory

Installation

60.3048.11ADA

Connector T - Inside Left Dali



OPTIONAL
Accessory

Installation

60.3048.14ADA

Connector T - Inside Left Dali



OPTIONAL
Accessory

Installation

60.3048.29ADA

Connector T - Inside Left Dali



OPTIONAL
Accessory

Mounting

60.3054

Lead bending key



OPTIONAL
Accessory

Installation

60.3057.11

Attachment on track for wire
suspension



OPTIONAL
Accessory

Installation

60.3057.29

Attachment on track for wire
suspension



OPTIONAL
Accessory

Installation

60.3092.11

Power supply rose cover



OPTIONAL
Accessory

Installation

60.3094.11

Ceiling fitting with rose



OPTIONAL
Accessory

Installation

60.3094.14

Ceiling fitting with rose



OPTIONAL
Accessory

Installation

60.3095.29

Lead-weighted wire 1500 mm



OPTIONAL
Accessory

Installation

60.3097.11

1 m suspension rod with ceiling
rose with m6 thread



OPTIONAL
Accessory

Installation

60.3097.14

1 m suspension rod extension
set with m6 thread



OPTIONAL
Accessory

Installation

60.3090.11A

Track cover strip L 2000 mm



OPTIONAL
Accessory

Installation

60.3090.14A

Track cover strip L 2000 mm



OPTIONAL
Accessory

Electrical

60.3037.14ADA

DALI Flexible connector



OPTIONAL
Accessory

Electrical

60.3037.11ADA

DALI Flexible connector



OPTIONAL
Accessory

Electrical

60.3038.11ADA

Live end right Dali



OPTIONAL
Accessory

Electrical

60.3038.14ADA

Live end right Dali



OPTIONAL
Accessory

Electrical

60.3038.12ADA

Live end right Dali



OPTIONAL
Accessory

Electrical

60.3039.14ADA

Live end left Dali



OPTIONAL
Accessory

Electrical

60.3039.12ADA

Live end left Dali



OPTIONAL
Accessory

Electrical

60.3039.11ADA

Live end left Dali



OPTIONAL
Accessory

Installation

60.3083.29

Complete wall support 70 mm



OPTIONAL
Accessory

60.3093.29

Bracket for fixing track to wall or ceiling



OPTIONAL
Accessory

Installation

60.3014.11

Suspension rod with 1m rose.
M6 thread



OPTIONAL
Accessory

Installation

60.3096.29

Lead-weighted wire 3000 mm