


FLOS

 F6301007 Fabric

KTribe Floor 3

Designed by Philippe Starck, 2007


Halogen - 250W



Floor lamp providing diffused lighting. Base, rod support and diffuser support in die-cast, polished and chrome-plated Zamak alloy. Galvanized P04 steel base cover. Injectionmolded PC (polycarbonate) opal inner diffuser and support for the lamp-holder. Outer diffusers in transparent or fumée PMMA (polymethylmethacrylate), and silver or bronze on the inner surface, by vacuum aluminum coating. Injection-molded PC (polycarbonate) upper ring, completely transparent or transparent diffuser and silver diffuser) or transparent brown for the outer bronze diffuser. On the cable there is the electronic dimmer which allows the regulation of light brightness.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

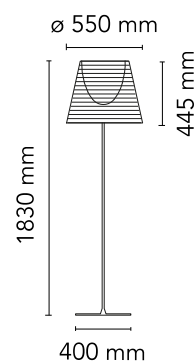

Main specifications

Mounting	Floor
Environments	Indoor dry location
Light source type	Bulb
Light sources included	No
Lamp category	Halogen
Lamp holders	E27
Ilcos	HSGS
Number of lamps	1
Power (W)	250

Physical

Colour	Fabric
Length (mm)	550
Cord colour	Black
Net weight (kg)	14.35
Package volume (m3)	0.73
IP internal	20

Download

[Mounting instructions](#)

[PDF](#)



Photometric

Lighting type	Direct, Indirect
Light distribution	Symmetric
Extreme cut off	No

Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
Dimmable	Yes
Dimming interface	Dimmer Integrated
Plug type	Type C
Batteries inside	No

Bulbs



NOT INCLUDED

RF26998

LED 21W E27 2450lm 3000K
DIMMER




NOT INCLUDED

RF30429

LED Opal Lamp E27 21W 2700K
A65 Dimmable

Spare Parts

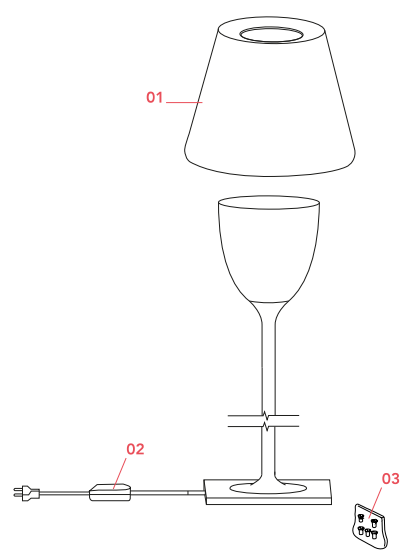

- | | | |
|-----|---|-----------|
| 01. | Ktribe Floor 3 Ivory soft diffuser assembly | F6298007 |
| 02. | Led rondo' dimmer 220/240v 40-250w 4-100w | RF28045 |
| 03. | Kit of 5 white feed pads for base | RF3020100 |



F6298007
Ktribe Floor 3 Ivory soft diffuser
assembly



RF28045
Led rondo' dimmer 220/240v 40-
250w 4-100w



RF3020100
Kit of 5 white feed pads for base