

FLOS

 F5600035 Red

Parentesi dimmer

Designed by Achille Castiglioni and Pio Manzu, 1971


Halogen - 150W



Lamp providing direct light. Lamp moves vertically via sliding of a painted or nickel-plated shaped steel tube on a ceiling-to-floor steel cable (4000 mm long). Fixture head made of injection-molded black elastomer. On the cable there is the electronic dimmer which allows the regulation of light brightness.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



Main specifications

EAN	8059607020463
Mounting	Suspension
Environments	Indoor dry location
Light source type	Bulb
Light sources included	No
Lamp category	Halogen
Lamp holders	E27
Ilcos	HSGSR
Number of lamps	1
Power (W)	150

Physical

Colour	Red
Length (mm)	110
Cord colour	Black
Canopy colour	Red
Canopy length/diameter (mm)	64
Canopy height (mm)	20
Net weight (kg)	3.57
Package height (mm)	90
Package width (mm)	150
Package length (mm)	610
Package volume (m ³)	0.01
IP internal	20

Download

Mounting instructions [!\[\]\(4f6bf54ae7e4144a72d78316053e412d_img.jpg\) PDF](#)

Photometric Files


LDT / IES [!\[\]\(56549452e01ca28bdf2500ced9653143_img.jpg\) LDT](#)

Technical Drawings


2D [!\[\]\(19d44b37fb4fa155bf9d60c77a3d3cb2_img.jpg\) ZIP](#)

3D [!\[\]\(5a351309c3b87e4420622c1f0e57efc0_img.jpg\) ZIP](#)

Bim [!\[\]\(bff896c19919791b89ab521f039b410a_img.jpg\) ZIP](#)



Schematic light drawing



Beam Angle: 131°		
h(m)	E(lx)	D(m)
1	156	4.37
2	39	8.75
3	17	13.12
4	10	17.50
5	6	21.87

Photometric

Light distribution	Symmetric
Extreme cut off	No

Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
Dimmable	Yes
Dimming interface	Dimmer Integrated
Plug type	Type C
Batteries inside	No

Accessories & Power Supply





OPTIONAL

F5700035

Parentesi dimmer Element

Bulbs



NOT INCLUDED

RF32366


LED Lamp 12W E27 220-240V
2700K R125

NOT INCLUDED

RF35355

LED Lamp 13W E27 220-240V
2700K R125

Spare Parts

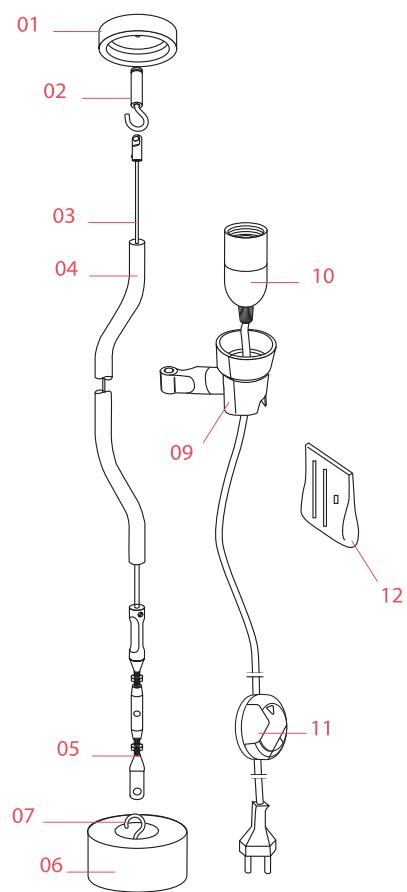

01.	Complete red rose	RF5400135
02.	Anchor hook screw	RF06745
03.	Parentesi 4m steel cable	RF01442
03.	Parentesi 6m steel cable	RF01444
04.	Red tube	RF02601
05.	Parentesi inox turnbuckle & grub screw	RF01438
06.	Base for Parentesi & Pasentesi D	RF5601600
07.	Hook + nut	RF06747
09.	Parentesi rubber support	RF35511
10.	Electric Wiring Assembly Led Rondò Dimmer	RF31753
11.	Led rondo' dimmer 220/240v 40-250w 4-100w	RF28045
12.	Kit wire ties and screw	RF5600200



RF5400135

Complete red rose



RF06745

Anchor hook screw



RF01442

Parentesi 4m steel cable



RF01444

Parentesi 6m steel cable



RF02601

Red tube



RF01438

Parentesi inox turnbuckle & grub screw



RF5601600

Base for Parentesi & Pasentesi D



RF06747

Hook + nut



RF35511

Parentesi rubber support



Electrical

RF31753

Electric Wiring Assembly Led
Rondò Dimmer



RF28045

Led rondo' dimmer 220/240v 40-
250w 4-100w



RF5600200

Kit wire ties and screw