

# FLOS

F5600058 Nickel

## Parentesi dimmer

Designed by Achille Castiglioni and Pio Manzu, 1971

Halogen - 150W



Lamp providing direct light. Lamp moves vertically via sliding of a painted or nickel-plated shaped steel tube on a ceiling-to-floor steel cable (4000 mm long). Fixture head made of injection-molded black elastomer. On the cable there is the electronic dimmer which allows the regulation of light brightness.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

### Main specifications

EAN	8059607020470
Mounting	Suspension
Environments	Indoor dry location
Light source type	Bulb
Light sources included	No
Lamp category	Halogen
Lamp holders	E27
Icos	HSGSR
Number of lamps	1
Power (W)	150

### Physical

Colour	Nickel
Length (mm)	110
Cord colour	Black
Cord length (mm)	4000
Canopy colour	Nickel
Canopy length/diameter (mm)	64
Canopy height (mm)	20
Net weight (kg)	3.57
Package height (mm)	90
Package width (mm)	150
Package length (mm)	610
Package volume (m3)	0.01
IP internal	20

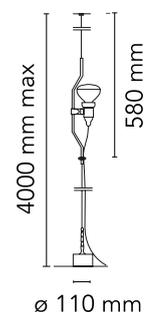

### Download

[Mounting instructions](#) PDF

### Photometric Files

[LDT / IES](#) LDT

### Technical Drawings


[2D](#) ZIP

[3D](#) ZIP

[Bim](#) ZIP



## Schematic light drawing



Beam Angle: 131°

h(m)	E(lx)	D(m)
1	156	4.37
2	39	8.75
3	17	13.12
4	10	17.50
5	6	21.87

## Photometric

Light distribution	Symmetric
Extreme cut off	No

## Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
Dimmable	Yes
Dimming interface	Dimmer Integrated
Plug type	Type C
Batteries inside	No

## Accessories & Power Supply




OPTIONAL

F5700058

Parentesi dimmer Element


## Bulbs

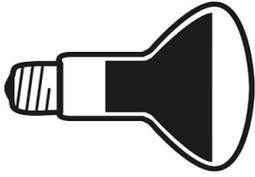

NOT INCLUDED

RF32366

LED Lamp 12W E27 220-240V  
2700K R125

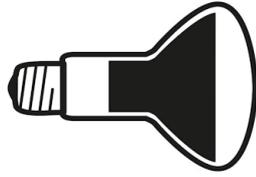


NOT INCLUDED

RF35355

LED Lamp 13W E27 220-240V  
2700K R125

## Spare Parts

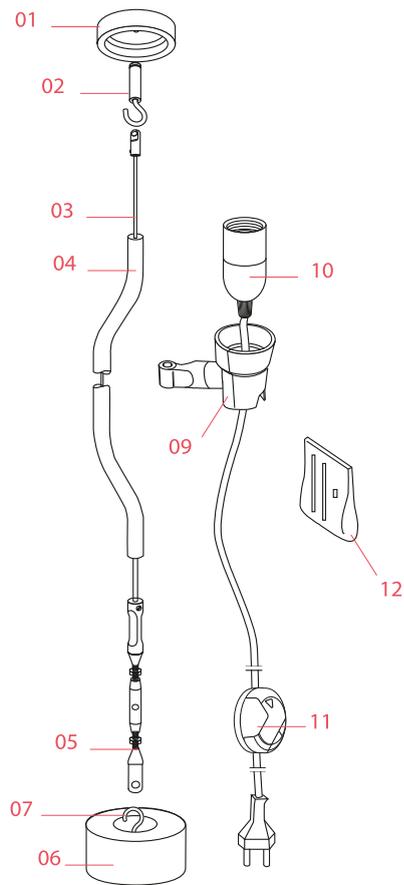

- |     |   |           |
|-----|---|-----------|
| 01. | Complete nickel rose                      | RF5400158 |
| 02. | Anchor hook screw                         | RF06745   |
| 03. | Parentesi 4m steel cable                  | RF01442   |
| 03. | Parentesi 6m steel cable                  | RF01444   |
| 04. | Nickel tube                               | RF02896   |
| 05. | Parentesi inox turnbuckle & grub screw    | RF01438   |
| 06. | Base for Parentesi & Pasentesi D          | RF5601600 |
| 07. | Hook + nut                                | RF06747   |
| 09. | Parentesi rubber support                  | RF35511   |
| 10. | Electric Wiring Assembly Led Rondò Dimmer | RF31753   |
| 11. | Led rondo' dimmer 220/240v 40-250w 4-100w | RF28045   |
| 12. | Kit wire ties and screw                   | RF5600200 |



RF5400158

Complete nickel rose



RF06745

Anchor hook screw



RF01442

Parentesi 4m steel cable



RF01444

Parentesi 6m steel cable



RF02896

Nickel tube



RF01438

Parentesi inox turnbuckle & grub screw



RF5601600

Base for Parentesi & Pasentesi D



RF06747

Hook + nut



RF35511

Parentesi rubber support



Electrical

RF31753

Electric Wiring Assembly Led  
Rondò Dimmer



RF28045

Led rondo' dimmer 220/240v 40-  
250w 4-100w



RF5600200

Kit wire ties and screw